

Next Level

event lighting

CHAUVET DJ tools for Big Occasion Power

see



Vivid 4 is a modular video panel that vividly displays content without the need of bulky media servers. Create dazzling video displays with these lightweight video panels that feature Black body LEDs that accurately reproduce high-contrast videos. Vivid 4 makes a perfect DJ façade and seamlessly integrates with Serato for displaying music videos to add gig excitement.

videopanel^s



Road Case Included



Vivid 4

Light Source: 21,632 SMD 2020 LEDs (tri-color RGB)
0.3 W, (60 mA), 50,000 hours life expectancy
Wavelength: 620 to 625 nm red, 516 to 530 nm green,
460 to 475 nm blue
Viewing Angle: 120°
Maximum Illuminance: 1,200 NITS
Calibrated Illuminance: 1,000 NITS
Contrast Ratio: 4,300:1
Refresh Rate: 1,920 Hz
Pixel Density: 43,264 m² (104 x 208)
Pixel Pitch: 4.8 mm
Minimum Viewing Distance: 12 ft (4 m)

Control Protocol: Novastar
Power I/O Connectors: Seetronic® powerKON®
Signal I/O Connectors: Seetronic® etherKON®
Power Linking: 7 units @ 120 V; 13 units @ 230 V
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Power and Current: 280 W, 2.3 A @ 120 V, 60 Hz
Power and Current: 280 W, 1.2 A @ 230 V, 50 Hz
Weight: 27.6 lb (12.5 kg)
Size: 19.7 x 1.9 x 39.4 in (500 x 65 x 1000 mm)
Maximum Vertical Hang: 23 panels
Maximum Horizontal Hang: 17 panels
Required Controllers: Vivid Drive 23N
Optional Mounting Brackets: RB-F50CM, RB-F100CM
Approvals: CE, MET

Vivid Drive 28N

Control Protocol: Novastar
Control Input Connectors: USB, RJ45
Video Input Connectors: HDMI, Display Port, DVI, VGA (x3),
CVBS (x2)
Video Output Connector: DVI, VGA, RJ45 (x2)
Max. Supported LEDs: 1,310,720
Max. Supported Panels (Vivid 4): 30 per RJ45
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Power and Current: 42 W, 0.7 A @ 120 V, 60 Hz
Power and Current: 42 W, 0.4 A @ 230 V, 50 Hz z
Weight: 4.8 lb (2.2 kg)
Size: 19 x 12 x 1.7 in (483 x 305 x 44 mm)
Approvals: CE

move

A DJ is performing on a stage, silhouetted against a large screen displaying a colorful, abstract pattern. The stage is illuminated by numerous bright blue and red moving head lights, creating a dynamic and energetic atmosphere. The lights are arranged in a circular pattern around the stage, with beams of light converging on the DJ. The background is dark, making the stage lights stand out prominently. The overall scene is a vibrant and lively event production.

The CHAUVET DJ line of Intimidator moving head fixtures is a powerful lighting addition to any large scale event production. Depending on which fixture is in your arsenal, a dynamic combination of bright LEDs, gobo and prism effects, zoom capability and more are at your service to bring your large scale events to life.

movingheads



Intimidator Hybrid 140SR

DMX Channels: 13 or 19
Light Source: Osram Sirius HRI 140 W discharge lamp, 6,000 hours
Zoom Angle: (motorized) (beam): 3° to 11° (spot): 7° to 21° (wash): 14° to 28°
Colors: 12 + white, split colors, continuous scroll at variable speeds
Gobo wheel (1): 9 + open, rotating, interchangeable, slot-n-lock, continuous scroll at variable speeds
Gobo wheel (2): 17 + open, metal, continuous scroll at variable speeds
Illuminance (3° beam): 382,000 lux @ 5 m
Illuminance (7° spot): 104,700 lux @ 5 m
Illuminance (14° wash): 4,680 lux @ 5 m
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Weight: 33.4 lb (15.2 kg)
Size: 12.6 x 8.6 x 20.2 in (322 x 220 x 513 mm)

Optional Road Case S35X



Intimidator Beam 140SR

DMX Channels: 8 or 14
Light Source: Osram Sirius HRI 140 W discharge lamp, 6,000 hours
Beam Angle (beam): 3°
Beam Angle (frost): 21°
Colors: 14 + white, split colors, continuous scroll at variable speeds
Gobos: 17 + open (all aluminum), fixed, continuous scroll at variable speeds
Prism: 16-facet round, bidirectional rotation at variable speeds
Illuminance: 382,000 lux @ 5 m
Illuminance: 37,900 lux @ 15 m
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Weight: 25.8 lb (11.7 kg)
Size: 12.7 x 8.6 x 16.5 in (322 x 220 x 420 mm)

Optional Road Case S35X



Intimidator Spot 475Z

DMX Channels: 10 or 16
Light Source: 1 LED (white) 250 W, (16.3 A), 50,000 hours
Zoom Angle (motorized): 13° to 28°
Gobos wheel (1): 7 + open (6 metal + 1 glass), rotating, interchangeable, indexing, continuous scroll at variable speeds
Gobo wheel (2): 8 + open, continuous scroll at variable speeds
Colors: 7 + white, split colors, continuous scroll at variable speeds
Illuminance (13°): 106,300 lux @ 2 m
Illuminance (28°): 23,680 lux @ 2 m
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Weight: 36.2 lb (16.5 kg)
Size: 14.3 x 9.8 x 20.9 in (363 x 250 x 531 mm)



Intimidator Spot 375Z

DMX Channels: 9 or 15
Light Source: 1 LED (white) 150 W, (12.3 A), 50,000 hours
Zoom Angle (motorized): 10° to 23°
Gobo Wheel: 7 + open (6 aluminum + 1 glass), rotating, interchangeable, indexing, slot-n-lock, continuous scroll at variable speeds
Colors: 7 + white, split colors, continuous scroll at variable speeds
Prism (1): 6-facet round, bidirectional rotation at variable speeds
Prism (2): 5-facet linear, bidirectional rotation at variable speeds
Illuminance: (10°): 38,000 lux @ 2 m
Illuminance: (23°): 19,850 lux @ 2 m
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Weight: 27.2 lb (12.4 kg)
Size: 8.6 x 12.7 x 18.3 in (220 x 322 x 466 mm)

Optional Road Case S35X



move

A DJ in a black t-shirt and pants is captured in a dynamic pose, leaning forward with arms outstretched, performing at a stage. The stage is flanked by large stacks of black speakers, secured with blue straps. In the center, a DJ booth with various equipment is visible. The background is filled with bright, colorful stage lights in shades of green, blue, and orange, creating a vibrant and energetic atmosphere. The word "move" is overlaid in large, white, lowercase letters across the top of the image.

Moving light makes events come alive. Give performance spaces a dynamic visual personality with animated razor sharp beams, crisp gobos and bright, colorful textures that only moving head fixtures can provide. Moving lights. Moving people.

movingheads



MET
C US

Intimidator Spot 360

DMX Channels: 8 or 14

Light Source: 1 LED (white) 100 W, (3.2 A), 50,000 hours

Zoom Angle (manual): 12° to 17°

Gobos: 7 + open (6 metal + 1 glass), rotating, interchangeable, indexing, slot-n-lock, continuous scroll at variable speeds

Colors: 8 + white, split colors, continuous scroll at variable speeds

Prism (1): 3-facet round, bidirectional rotation at variable speeds

Prism (2): 5-facet linear, bidirectional rotation at variable speeds

Illuminance (12°): 5,470 lux @ 5 m

Illuminance (17°): 19,710 lux @ 2 m

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

Weight: 25 lb (11.4 kg)

Size: 16.65 x 12.68 x 11.69 in (423 x 322 x 297 mm)

Optional Road Case S35X



MET
C US

Intimidator Wash Zoom 450

DMX Channels: 14 or 29

Light Source: 12 LEDs (quad-color RGBW) 15 W (3.7 A), 50,000 hours

Zoom Angle (motorized): 14° to 58°

Illuminance: (14°): 25,610 lux @ 2 m

Illuminance: (58°): 1,960 lux @ 2 m

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

Weight: 15.8 lb (7.2 kg)

Size: 7.6 x 10.9 x 14.3 in (194 x 277 x 363 mm)



Intimidator Trio

DMX Channels: 15 or 30

Light Source: 6 LEDs (quad-color RGBW) 21 W (6.3 A), 50,000 hours

Zoom Angle (motorized): 7° to 53°

Illuminance: (7°): 16,000 lux @ 2 m

Illuminance: (53°): 1,350 lux @ 2 m

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

Weight: 20 lb (9.2 kg)

Size: 10.9 x 10.9 x 15.2 in (278 x 278 x 386 mm)

wasin



CHAUVET DJ SlimPAR Pro wash lights provide a bright, powerful punch for maximum event lighting impact and can wash any stage or event space with warm, rich and vibrant colors. With the new addition of D-Fi USB compatibility, SlimPAR Pro fixtures are equipped with wireless DMX capability taking creative lighting flexibility to new heights.

washfixtures



SlimPAR Pro W USB

DMX Channels: 3, 4 or 9

Light Source: 12 (tri-color CW,WW,A) 6 W (1.4 A), 50,000 hours

Beam Angle: 17°

Illuminance: 3,097 lux @ 2 m

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

Weight: 7 lb (3.2 kg)

Size: 10 x 3.9 x 11.4 in
(253 x 98 x 290 mm)



SlimPAR Pro Q USB

DMX Channels: 4, 5 or 10

Light Source: 12 (quad-color RGBA) 6 W (2 A), 50,000 hours

Beam Angle: 16°

Illuminance: 5,690 lux @ 2 m

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

Weight: 7.2 lb (3.3 kg)

Size: 10 x 3.9 x 11.4 in
(253 x 98 x 290 mm)



SlimPAR Pro H USB

DMX Channels: 6, 7 or 12

Light Source: 12 (hex-color RGBAW+UV) 10 W (2.4 A), 50,000 hours

Beam Angle: 24°

Illuminance: 3,218 lux @ 2 m

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

Weight: 7.2 lb (3.3 kg)


Size: 10 x 3.9 x 11.4 in
(253 x 98 x 290 mm)

haze & fog

A live music performance on a stage. A guitarist is playing a white electric guitar. The stage is lit with warm yellow spotlights and vibrant blue and green laser beams. A large, dense crowd of people is visible in the foreground, their heads silhouetted against the stage lights. The overall atmosphere is energetic and atmospheric.

CHAUVET DJ has a variety of haze machines, fog machines and atmospheric effects with a full array of powerful production features to meet any event effect needs.

haze & fog machines

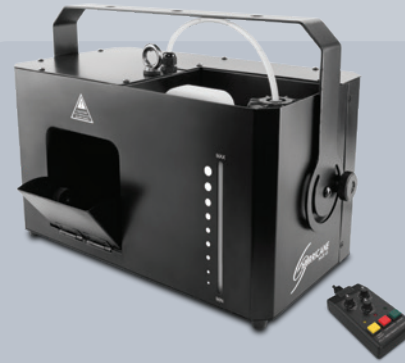

Hurricane Haze 4D

DMX Channels: 2
Tank Capacity: 0.9 gal (3.75 l)
Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
Output: 4,300 cfm
Weight: 13.2 lb (6 kg)
Size: 11 x 15.5 x 9.6 in (277 x 396 x 245 mm)



Hurricane 1600

DMX Channels: 1
Tank Capacity: 0.63 gal (2.4 l)
Input Voltage: 120 VAC, 60 Hz or 230 V, 50 Hz
Output: 25,000 cfm
Weight: 13.2 lb (6 kg)
Size: 13.7 x 12.3 x 10 in (348 x 312 x 253 mm)



Hurricane 1800 Flex

DMX Channels: 1
Tank Capacity: 1 gal (3.8 l)
Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
Output: 25,000 cfm
Weight: 19.0 lb (8.7 kg)
Size: 20.4 x 11.9 x 10.8 in (518 x 302 x 274 mm)

Atmospheric Fluids



QDF

Quick Dissipating Fluid



FJU

High Performance Fog Fluid



HDF

High Density Fog Fluid



HFG

High Performance Haze Fluid

haze & fog

Create a white fog that hugs the floor and dissipates without rising or blast a dynamic and safe pyrotechnic-like effect without the use of any toxic chemicals.

haze & fog machines



Cumulus

Tank Capacity: .9 gal (3.25 l)
Water Tank Capacity: 2 gal (7.6 l)
Heat-up time: 3 min
Output: 10,000 cfm
Fog Fluid Consumption: 80 ml/min
Water Consumption: 930 ml/min
Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
Weight: 58.8 lb (26.7 kg)
Size: 25 x 16 x 18 in (625 x 409 x 453 mm)



Nimbus

Tank Capacity: 4.5 gal (17 l)
Heat-up time: (single element): 50 min
Heat-up time: (dual element): 30 min
Reheat time: (single element): 30 min
Reheat time: (dual element): 15 min
Average runtime: 6 min
Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
Dry ice capacity: 10 lb (4.5 kg)
Weight (full): 75 lb (34 kg)
Size: 20 x 18 x 19 in (513 x 465 x 470 mm)



Hurricane Bubble Haze

Tank Capacity: 0.21 gal (0.8 l) each
Heat-up Time: 3 min
Output: 10,000 cfm
Fluid Consumption (haze): 16 ml/min
Fluid Consumption (bubble): 22 ml/min
Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
Weight: 20.2 lb (9.2 kg)
Size: 12.2 x 12.3 x 15.5 in (310 x 312 x 394 mm)
Compatible Fluids (haze): HDF, HFG
Compatible Fluids (bubble): BJD

freedom



CHAUVET DJ's battery powered Freedom series fixtures are 100% wireless D-Fi transceiver technology. Bright, dynamic light with a variety of LED color combinations for unlimited color mixing anywhere you need it.

battery powered



Freedom Par Hex-4

DMX Channels: 6, 8, or 12

Light Source: 4 LEDs (hex-color RGBAW+UV) 10 W (2 A), 50,000 hours

Beam Angle: 23°

Maximum Run Time: (single color) up to 20 hours

Illuminance: 1,372 lux @ 2 m

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

Weight: 6.2 lb (2.9 kg)

Size: 5.4 x 5.7 x 7.2 in (138 x 145 x 184 mm)



Freedom Par Quad-4

DMX Channels: 4, 6 or 10

Light Source: 4 LEDs (quad-color RGBA) 5 W (2 A), 50,000 hours

Beam Angle: 15°

Maximum Run Time: (single color) up to 20 hours

Illuminance: 2,300 lux @ 2 m

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

Weight: 6.2 lb (2.8 kg)

Size: 5.4 x 5.7 x 7.2 in (138 x 145 x 184 mm)



Freedom Flex H4 IP

DMX Channels: 6, 8 or 12

Light Source: 4 LEDs (hex-color RGBAW+UV) 10 W, (2 A), 50,000 hours

Beam Angle: 23°

Maximum Run Time: (single color) up to 20 hours

Illuminance: 2,163 lux @ 2 m

Weight: 8.8 lb (4 kg)

Size: 5.7 x 5.4 x 8 in (145 x 138 x 204 mm)

freedom



CHAUVET DJ's battery powered Freedom series fixtures are 100% wireless D-Fi transceiver technology. Bright, dynamic light with a variety of LED color combinations for unlimited color mixing anywhere you need it.

battery powered



FC

Freedom Centerpiece

DMX Channels: 6, 8, 10, 12 or 16
Light Source (ring 1): 12 LEDs (quad-color RGBW) 0.2 W (0.018 mA) 50,000 hours
Light Source (ring 2): 7 LEDs (quad-color RGBW) 0.2 W (0.018 mA) 50,000 hours
Light Source (ring 3): 20 LEDs (dual-color CW/WW) 0.1 W (0.018 mA) 50,000 hours
Beam Angle: 23°
Maximum Run Time (single color): up to 16 hours
Illuminance: 510 lux @ 1 m
Weight: 3 lbs (1.3 kg)
Size: 9.4 x 9.4 x 1.3 in (237.9 x 237.9 x 32.5 mm)



FC

Freedom Cyc

DMX Channels: 4, 6 or 10
Light Source: 16 LEDs (4 red, 4 green, 4 blue, 4 warm white) 48 W total (3.5 A), 50,000 hours
Beam Angle: 52°
Maximum Run Time (single color): up to 20 hours
Illuminance: 418 lux @ 2 m
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Weight: 7.2 lb (3.3 kg)
Size: 7.5 x 5.8 x 5.4 in (191.2 x 148.2 x 138 mm)



FC

Freedom Q1N

DMX Channels: 4, 6 or 10
Light Source: 1 LED (quad-color RGB+WW) 6 W, (2 A), 50,000 hours
Color Temperature (WW LED): 3700 K
Beam Angle (w/o filter) : 8°
Maximum Run Time (single color): up to 15 hours
Illuminance (w/o filter): 1,700 lux @ 2 m
Input Voltage: 8.4 VDC, 1.3 A (external power supply: 100-240 VAC, 47/63 Hz)
Weight: 1.4 lb (0.6 kg)
Size: 3.8 x 3 x 5.5 in (97 x 75 x 139 mm)



FC

Freedom H1

DMX Channels: 6, 8 or 12
Light Source: 1 LED (hex-color RGBAW+UV) 10 W, (3 A), 50,000 hours
Beam Angle: 21°
Maximum Run Time: (single color) up to 20 hours
Illuminance (w/o filter): 314 lux @ 2 m
Input Voltage: 8.4 VDC, 1.35 A (external power supply: 100-240 VAC, 50/60 Hz)
Weight: 1.4 lb (0.7 kg)
Size: 3.8 x 3 x 8.5 in (97 x 75 x 139 mm)

Outdoor



CHAUVET DJ IP-rated fixtures are built rugged to withstand the elements and deliver powerful outdoor lighting options rain or shine.

outdoor fixtures



COLORband PiX IP

DMX Channels: 3, 4, 6, 7, 9, 12, 18 or 36
Light Source: 12 LEDs (tri-color RGB) 3 W (1,050 mA), 50,000 hours
Beam Angle: 20°
Illuminance: 2,325 lux @ 2 m
P Rating: IP65
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Weight: 13.5 lb (6.1 kg)
Size: 39 x 3.9 x 6.8 in (993 x 100 x 173 mm)



SlimPANEL Tri 24 IP

DMX Channels: 3, 4, 5 or 9
Light Source: 24 LEDs (tri-color RGB) 3 W (1,050 mA), 50,000 hours
Beam Angle: 20°
Illuminance: 5,850 lux @ 2 m
IP Rating: IP65
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Weight: 13.8 lb (6.2 kg)
Size: 10.5 x 11.9 x 5.3 in (268 x 301 x 134 mm)



Freedom Par Quad-4 IP

DMX Channels: 4, 6 or 10
Light Source: 4 LEDs (quad-color RGBA) 5 W, (2 A), 50,000 hours
Beam Angle: 15°
Illuminance: 2,464 lux @ 2 m
IP Rating: IP54
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Weight: 8.0 lb (3.6 kg)
Size: 5.7 x 5.4 x 7.5 in (145 x 138 x 191 mm)



Freedom Flex H4 IP

DMX Channels: 6, 8 or 12
Light Source: 4 LEDs (hex-color RGBAW+UV) 10 W, (2 A), 50,000 hours
Beam Angle: 23°
Maximum Run Time: (single color) up to 20 hours
Illuminance: 2,163 lux @ 2 m
IP Rating: IP54
Weight: 8.8 lb (4 kg)
Size: 5.7 x 5.4 x 8 in (145 x 138 x 204 mm)

EVENT

SIouxLAND 
oral & maxillofacial
surgery

A new day of production lighting power. Stage-ready fixtures produce powerful warm spots and washes to highlight the action.

EVEseries



EVE E-100Z

DMX Channels: 1 or 3
Light Source: 1 LED (warm white) 100 W (2.3 A), 50,000 hours
Color Temperature: 3500 K
Gobo Size: M (66 mm outside, 48 mm image, 2 mm max thickness)
Zoom Angle (manual): 14° to 30°
Illuminance: (14°): 15,100 lux @ 2 m
Illuminance: (30°): 3,800 lux @ 2 m
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Weight: 12.6 lb (5.7 kg)
Size: 24 x 7.2 x 16.9 in (611 x 183 x 430 mm)



EVE E-50Z

DMX Channels: 1 or 3
Light Source: 1 LED (warm white) 50 W, (1.3 A), 50,000 hours
Color Temperature: 3500 K
Gobo Size: D (53.3 mm outside, 43 mm image, 2 mm max thickness)
Zoom Angle (manual): 20° to 39°
Illuminance: (20°): 7,910 lux narrow @ 2 m
Illuminance: (39°): 2,710 lux wide @ 2 m
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Weight: 9.2 lb (4.2 kg)
Size: 18.9 x 6.2 x 15 in (480 x 157 x 381 mm)



EVE F-50Z

DMX Channels: 1 or 3
Light Source: 1 LED (warm white) 50 W, (1.3 A), 50,000 hours
Color Temperature: 3500 K
Zoom Angle (manual): 17° to 50°
Illuminance: (17°): 4,780 lux @ 2 m
Illuminance: (50°): 998 lux @ 2 m
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Weight: 8.4 lb (3.9 kg)
Size: 11.1 x 8.3 x 13 in (281 x 212 x 328 mm)



EVE TF-20

Light Source: 1 COB LED (warm white) 20 W, (0.5 A), 50,000 hours
Color Temperature: 2700 K
Beam Angle: 24°
Illuminance: 1,506 lux @ 2 m
Input Voltage: 85 to 120 VAC, 50/60 Hz (auto-ranging)
Weight: 2.6 lb (1.2 kg)
Size: 6 x 5.5 x 7.25 in (153.5 x 140 x 184 mm)

EVE



Sometimes the most effective event lighting is a subtle, warm and rich splash of color. The EVE series of wash lights can turn an event space from dull to thrilling. They provide robust and tasteful color palletes that personalize a space and create colorful backgrounds for events.

EVEseries



Gel Frame Included

EVE P-100 WW

DMX Channels: 1, 2 or 4
Light Source: 1 COB LED (warm white)
100 W, (2.7 A), 50,000 hours
Color Temperature: 3500 K
Illuminance (25°): 7,920 lux @ 2 m
Illuminance (35°): 4,340 lux @ 2 m
Input Voltage: 100 to 240 VAC,
50/60 Hz (auto-ranging)
Weight: 7.6 lb (3.5 kg)
Size: 8.6 x 9.65 x 12 in (220 x 245 x 305 mm)



Gel Frame Included

EVE P-130 RGB

DMX Channels: 3 or 9
Light Source: 40 LEDs (13 red, 13
green, 14 blue) 130 W total, (2.5 A),
50,000 hours
Illuminance (25°): 2,190 lux @ 2 m
Illuminance (35°): 1,100 lux @ 2 m
Input Voltage: 100 to 240 VAC,
50/60 Hz (auto-ranging)
Weight: 7.6 lbs (3.5 kg)
Size: 8.6 x 9.65 x 12 in (220 x 245 x 305 mm)



Gel Frame Included

EVE P-140 VW

DMX Channels: 3 or 9
Light Source: 40 LEDs (13 cool white,
13 warm white, 14 amber) 140 W total,
(2.4 A), 50,000 hours
Color Temperature Range: 2700 to
13000 K
Illuminance (25°): 2,490 lux @ 2 m
Illuminance (35°): 1,245 lux @ 2 m
Input Voltage: 100 to 240 VAC,
50/60 Hz (auto-ranging)
Weight: 7.6 lbs. (3.5 kg)
Size: 8.6 x 9.65 x 12 in (220 x 245 x 305 mm)



Gel Frame Included

EVE P-150 UV

DMX Channels: 1 or 5
Light Source: 40 LEDs (UV)
150 W total, (2 A), 50,000 hours
Coverage Angle (narrow lens): 25°
Coverage Angle (no lens): 35°
Input Voltage: 100 to 240 VAC,
50/60 Hz (auto-ranging)
Weight: 7.6 lbs (3.5 kg)
Size: 8.6 x 9.65 x 12 in (220 x 245 x 305 mm)



GLOBAL HEADQUARTERS

5200 NW 108th Avenue
Sunrise, FL 33351
USA

LAS VEGAS BRANCH

3325 W. Sunset Rd.
Suite i
Las Vegas, NV 89118
USA

MEXICO BRANCH

Av. de las Partidas 34 - 3B
(entrada por Calle 2) Zona
Industrial Lerma
Lerma, Edo. de México, CP 52000
México

EUROPEAN OFFICES

BELGIUM BRANCH

Stokstraat 18
9770 Kruishoutem
Belgium

FRANCE BRANCH

3, rue Ampère
91380 Chilly Mazarin
France

GERMANY BRANCH

Bruno-Burgel-Str. 11
DE-28759 Bremen
Germany

UK BRANCH

Unit 1C Brookhill Road
Industrial Estate
Pinxton, Nottingham
NG16 6NT
United Kingdom