





Vivid 4 Vivid Drive





Freedom Freedom Freedom Freedom Freedom Freedom NEW Free **NEW** Free

NEW Free NEW Free **NEW** Free Freedom Freedom S



Freedom Freedom NEW Fest



BTAir NEW EZLi NEW COLO EZLink Pa EZLink Pa SlimPAR (SlimPAR T COLORban 4BAR LTB

"The CHAUVET name and logo and the other brands and trademarks in this catalog, including, but not limited to, CHAUVET DJ, VIVID, INTIMIDATOR, FREEDOM, EVE, SLIMPAR, SLIMPANEL, COLORBAND, COREPAR, BTAIR, EZLINK, D-FI, D-FI USB, GIGBAR, HURRICANE, GEYSER, NIMBUS, CUMULUS, FUNFETTI, SCORPION, SWARM, ROTOSPHERE, LINE DANCER, KINTA, ABYSS, FLARECON, OBEY and FOOT-C are registered trademarks or trademarks owned by CHAUVET in the U.S. and other countries and may not be used by a third party for any purpose without the prior written consent of CHAUVET."

For complete specifications, visit ChauvetDJ.eu | All products meet CSA and CE standards. Specifications subject to change without notice.

Table of Contents

VIDEO PANELS

		5
/e 28N		5

OVING HEADS & SCANNERS

Intimidator Hybrid 140SR	
Intimidator Spot 4752	
Intimidator Spot 375Z	
Intimidator Spot 360	
Intimidator Spot 260	
NEW Intimidator Spot 160	
Intimidator Spot 110	
Intimidator Beam 355	
Intimidator Wash Zoom 450	
Intimidator Scan 305	
Intimidator Scan 110	11

ATTERY & WIRELESS DMX

ı Par Hex-4 IIIII.	14
n Flex H4 IP 📖	14
n Flex Battery IIIIII.	14
ı Par Quad-4 IP IIIII	14
1 Par Tri-6 @@	15
n H1 IIIII.	15
edom Q1N IIIII	15
edom Centerpiece 🎹	16
edom Cyc 🎹	16
edom Wedge Quad	17
edom Gobo IP 🎹	
ו Stick ש	17
) Stick Pack 🎹	17

EXTERIOR

ı Par Quad-4 IP IIIII	
n Flex H4 IP	
stoon 2 RGB	19
stoon 2 EXT RGB	19

LUETOOTH

′Link Par Q1BT IIIII	
DLORband Q3BT	27
Par Q4BT [[[]]].	27
Par Q6BT [[[]]]•	
R Q12BT	
112BT	
and T3BT	29
ГВТ	29



EVE E-100Z	21
EVE E-50Z	
EVE F-50Z	
EVE TF-20	
EVE 11-20	
EVE P-130 RGB	
EVE P-140 VW	
EVE P-150 UV	
SlimPAR Pro Q USB	25
SlimPAR Pro H USB	25
NEW COLORband Q3BT	
NEW EZLink Par Q1BT IIIII	27
EZLink Par Q4BT IIIII.	
EZLink Par Q6BT IIIII	
SlimPAR Q12BT	
SlimPAR T12BT	
COLORband T3BT	
4BAR LTBT	
COREpar 40 USB	
COREpar 80 USB	30
COREpar UV USB	30
COLORband PiX USB	31
COLORband PiX-M USB	31
SlimBANK T18 USB	32
SlimPAR H6 USB	
SlimPAR Q6 USB	
SlimPAR Q12 USB	
SlimPAR T12 USB	
Slimpar T6 USB	
SlimPAR 56	



NEW GigBAR Move	35
GigBAR 2	
4BÅR LTBT	
NEW Festoon 2 RGB	
NEW Festoon 2 EXT RGB	36
NEW Obsession	
Wash FX 2	37
Swarm Wash FX	
Swarm 5 FX	
Rotosphere Q3	38
Mini Kinta IRC	
Kinta FX	
BOB LED	
-	

8 **GOBO PROJECTORS**

NEW Freedom Gobo IP IIII



_	
NEW Pinspot Bar	41
EZpin Pack 4 IIIII	41
EZBar IIIII	41
LED Pinspot 2	41
EVE E-100Z	

EVE E-50Z	42
LED Followspot 75ST	
LED Followspot 120ST	42









ATMOSPHERICS \sim

Gevser P7	45
Funfetti Shot	
Hurricane Haze 4D	
Hurricane 1000	
Hurricane 1600	47
Hurricane Haze 1DX	47
Hurricane 1200	47
Hurricane 700	47
Cumulus	
Nimbus	48
Nimbus Cart	
NEW Hurricane Bubble Haze	49
Bubble King (B-550)	49
Atmospheric Remotes	49
Atmospheric Fluids	49



.39

COREpar UV USB5	51
EVE P-150 UV5	51



CONTROLLERS

BTAir5	52
FlareCON	52
NEW FlareCON Air 2	52
ShowXpress5	53
NEW Xpress-Rack 1024	
NEW Xpress-1024	
NEW Xpress-512S	
IRC-6	
DMX-AN 2	56
D-Fi Hub	56
Obev 70	56
Data Stream 4	56
Obev 405	56
Data Stream 8	56



Portable Stands	57
Clamps	
Cables	
VIP Gear Bags	58

High Quality Video Vivid 4 Lighter, Easier.

Vivid 4

Vivid 4 is a modular video panel that vividly displays content without the need for bulky media servers. Create dazzling video displays with these lightweight video panels that feature black body LEDs that accurately reproduce high-contrast videos. Vivid 4 makes a perfect DJ facade and seamlessly integrates with Serato for displaying music videos to add gig excitement. Setup is easy and fast with multiple magnets and positioning pins that make getting up and running tool-free and effortless. Stellar reliability and quality are built into Vivid 4. Dual power supplies ensure downstream panels don't lose signal. Intelligent modules with dedicated memory improve the image quality and simplify maintenance. Panels can be suspended vertically or horizontally, offering different aspect ratio options. Multiple Speego connectors mean Vivid 4 sets up twice as fast as other panels.











Multiple magnets and positioning pins effortlessly allow a tool free, one-person setup

Elongated sise with multiple Speego connectors sets up 2x faster than other panels

Extremely lightweight due to the magnesium die-cast housing

Seetronic® powerKON® and Seetronic® etherKON® Cables

• Light Source: 21,632 SMD 2020 LEDs (tri-colour RGB) 0.3 W, (60 mA), 50,000 hours • Wavelength: 620 to 625 nm red, 516 to 530 nm green, 460 to 475 nm blue Viewing Angle: 120° Maximum Illuminance: 1,200 NITS Calibrated Illuminance: 1.000 NITS Contrast Batio: 4.300:1 Refresh Rate: 1.920 Hz Pixel Density: 43,264 m2 (104 x 208) Pixel Pitch: 4.8 mm Minimum Viewing Distance: 12 ft (4 m) Control Protocol: Novastar Power I/O Connectors: Seetronic® powerKON® Signal I/O Connectors: Seetronic® etherKON® Power Linking: 7 units @ 120 V; 13 units @ 230 V Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging) Power and Current: 280 W. 2.3 A @ 120 V. 60 Hz Power and Current: 280 W. 1.2 A @ 230 V. 50 Hz Weight: 12.5 kg (27.6 lbs) Size: 500 x 65 x 1000 mm (19.7 x 1.9 x 39.4 in) Maximum Vertical Hang: 23 panels Maximum Horizontal Hang: 17 panels Required Controllers: Vivid Drive 28N Optional Accessories: DRBF50CM, DRBF100CM, DRBCURVEKIT 2, Available DRBF50CM and DRBF100CM Mounting Rig Bars, DRBCURVEKIT 2. VIDCURVEKIT, and GROUNDSUPPORT2KIT VIDCURVEKIT. GROUNDSUPPORT2KIT





Vivid Drive 28N

Vivid Drive 28N is an easy-to-use video driver for CHAUVET DJ Vivid video panels or any Novastar video panel. No computer needed! Vivid Drive 28N features powerful standalone mapping and a built-in video scaler for quick resizing of video content. Numerous input/output options are on board as well as backlit buttons for easy viewing in dark environments. The front knob can be set to control the master dimmer and you can seamlessly transition between different inputs with multiple transition effects. Compact 1U packing eases transportation and integration into your existing setup.

- Rackmount: 1U
- Control Protocol: Novastar
- Control Input Connectors: USB, RJ45
- Video Input Connectors: HDMI, Display Port, DVI, VGA (x3), CVBS (x2)
- Video Output Connector: DVI, VGA, RJ45 (x2)
- Max. Supported LEDs: 1,310,720
- Max. Supported Panels (Vivid 4): 30 per RJ45
- Max. Supported Resolution: 1920 x 1080
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Power and Current: 42 W. 0.7 A @ 120 V. 60 Hz
- Power and Current: 42 W. 0.4 A @ 230 V. 50 Hz
- Weight: 2.2 kg (4.8 lbs)
- Dimensions: 483 x 305 x 44 mm (19 x 12 x 1.7 in)

Photo by: MKDevo

Intimidator Series Moving Lights. Moving People.

Optional IRC-6 Remote


Intimidator Hybrid 140SR

Intimidator Hybrid 140SR is a true hybrid moving head that is an all-in-one light fixture that transfoms from SPOT to BEAM to WASH effortlessly. It is fitted with an intense 140 W discharge light engine and can create dynamic beam effects with dual overlapping, independently controlled prisms. Dual gobo wheels allow for gobo morphing and amazing mid-air projections and the motorised zoom works in beam, spot and wash modes for ultimate light control. The glass optics of Intimidator Hybrid 140SR ensures crisp beams and gobos.

- · Light Source (included): Osram Sirius HRI 140 W discharge lamp, 6,000 hours Zoom Angle Motorised (beam): 3° to 11° (spot): 7° to 21° (wash): 14° to 28° Gobo Wheel (1): 9 + open, rotating, indexing, interchangeable, slot-n-lock, continuous scroll at variable speeds

- Weight: 15.2 kg (33.4 lbs)













DMX Channels: 13 or 19

- Gobo Wheel (2): 17 + open, aluminum, continuous scroll at variable speeds
- Colours: 12 + white, split colours, continuous scroll at variable speeds
- Prism (1): 8-facet round, bidirectional rotation at variable speeds
- Prism (2): 6-facet linear, bidirectional rotation at variable speeds
- Illuminance (3° beam): 382,000 lux @ 5 m
- Illuminance (7° spot): 104.700 lux @ 5 m
- Illuminance (14° wash): 4,680 lux @ 5 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Size: 322 x 220 x 513 mm (12.6 x 8.6 x 20.2 in)





Intimidator Spot 475Z

Optional IRC-6 Remote

Intimidator Spot 475Z is a powerful moving head designed for spotlighting large events. This fixture can adapt to short-throw or long-throw situations, courtesy of its motorised zoom. Achieve incredible visual effects with dual rotating prisms which split the beam, creating dramatic displays. It also comes equipped with dual gobo wheels for gobo morphing and amazing mid-air projections! This featurepacked powerhouse utilises motorised focus to channel crisp projections at almost any distance. Beams stay where you want them with built-in Totem mode. It has powerCON®-compatible power input/output connections for power linking.

- DMX Channels: 10 or 16
- Light Source: 1 LED (white) 250 W, (16.3 A), 50,000 hours
- Colours: 7 + white, split colours, continuous scroll at variable speeds
- Gobos wheel (1): 7 + open (6 metal + 1 glass), rotating, interchangeable, indexing.
- continuous scroll at variable speeds
- Gobo wheel (2): 8 + open, continuous scroll at variable speeds
- Prism (1): 6-facet round, bidirectional rotation at variable speeds
- Prism (2): 6-facet linear, bidirectional rotation at variable speeds
- Zoom Angle (motorised): 13° to 28°
- Illuminance (13°): 106,300 lux @ 2 m
- Illuminance (28°): 23,680 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 16.5 kg (36.2 lbs)
- Size: 363 x 250 x 531 mm (14.3 x 9.8 x 20.9 in)









Intimidator Spot 375Z

Intimidator Spot 375Z is an exceptionally bright, 150 W LED moving head spot designed for large events. It features motorised zoom for short or long-throw applications. Dual rotating prisms split the beam for great effects and to cover a larger area. The motorised focus ensures crisp projections at almost any distance and the built-in Totem mode keeps the beams exactly where you want them. Intimidator Spot 375Z includes built-in, automated and sound-activated programs or it can be controlled in DMX or master/slave mode. PowerCON®-compatible power input/output connections for power linking are also onboard.

- DMX Channels: 9 or 15
- Light Source: 1 LED (white) 150 W, (12.3 A), 50,000 hours
- Zoom Angle (motorised): 10° to 23°
- Colours: 7 + white, split colours, continuous scroll at variable speeds
- Gobos: 7 + open (6 aluminum + 1 glass), rotating, interchangeable, indexing, slot-n-lock, continuous scroll at variable speeds
- Gobo Size: 24 mm outside, 20 mm image, 1 mm max. thickness
- Prism (1): 6-facet round, bidirectional rotation at variable speeds
- Prism (2): 5-facet linear, bidirectional rotation at variable speeds
- Illuminance (10°): 38,000 lux @ 2 m / (23°): 19,850 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 12.4 kg (27.2 lbs)
- Size: 220 x 322 x 466 mm (8.6 x 12.7 x 18.3 in)









Optional IRC-6 Remote

Intimidator Spot 360

Intimidator Spot 360 is a 100 W LED packed with mobile event lighting power. Dual rotating prisms are on board to split the beam and cover a larger area with Intimidator Spot 360's impressive visuals. Throw light even farther by decreasing the beam angle 5° using the manual zoom. Motorised focus gives you the ability to create sharp gobo patterns from almost any distance and Totem mode lets you keep the beams forward. Intimidator Spot 360 lets you set, save, and recall 1 scene manually, directly from the full-colour LCD display. Intimidator Spot 360 uses powerCON®-compatible power input/output connections for power linking.

- DMX Channels: 8 or 14
- Light Source: 1 LED (white) 100 W, (3.2 A), 50,000 hours
- Colours: 8 + white, split colours, continuous scroll at variable speeds
- Gobos: 7 + open (6 metal + 1 glass), rotating, interchangeable, indexing, slot-n-lock, continuous scroll at variable speeds
- Gobo Size: 24 mm outside, 20 mm image, 1.1 mm max thickness
- Prism (1): 3-facet round, bidirectional rotation at variable speeds
- Prism (2): 5-facet linear, bidirectional rotation at variable speeds
- Zoom Angle (manual): 12° to 17°
- Illuminance (12°): 35,010 lux @ 2 m
- Illuminance (17°): 19,710 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 11.4 kg (25 lbs)
- Size: 423 x 322 x 297 mm (16.65 x 12.68 x 11.69 in)







Intimidator Spot 260

Give your mobile performances some lighting punch with the feature-packed Intimidator Spot 260. It features a 75W LED and motorised focus that lets you project crisp gobos from nearly any distance. Throw light farther by decreasing the beam angle 5° using the manual zoom. Keep the party energised using Totem mode that keeps beams on the dance floor and a 3-facet prism splits the beam and covers a larger area to thrill event guests. Intimidator Spot 260 lets you set, save, and recall 1 scene manually, directly from the full-colour LCD display. Link up to 4 fixtures to create eye-catching, synchronised shows in Automated or Sound mode. You can also use convenient, wireless non-DMX control using the optional IRC-6 remote. Intimidator Spot 260 has powerCON®-compatible power input/output connections for power linking. Fits best in the CHS-2XX VIP Gear Bag.

- DMX Channels: 8 or 14
- Light Source: 1 LED (white) 75 W, (3.3 A), 50,000 hours
- Colours: 8 + white, split colours, continuous scroll at variable speeds
- Gobos: 7 + open (6 metal + 1 glass), rotating, interchangeable, slot-n-lock, continuous scroll at variable speeds
- Gobo Size: 24 mm outside, 20 mm image, 1.1 mm max thickness
- Prism: 3-facet round, static
- Zoom Angle (manual): 12° to 17°
- Illuminance (12°): 12,030 lux @ 2 m
- Illuminance (17°): 2,530 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 5.6 kg (12.2 lbs)
- Size: 232 x 163 x 351 mm (9.1 x 6.4 x 13.8 in)







NEW



- Beam Angle: 17°





8





Intimidator Spot 160

Intimidator Spot 160 is the epitome of compact moving head power. This feature-packed moving head is designed for mobile performances with CHAUVET DJ's innovative built-in Totem mode, keeping beams focused on the dance floor. One scene can be set, saved, and recalled manually from the full-colour LCD display. A convenient ¹/₄-turn hanging bracket allows for quick removal when needed, and up to 4 fixtures can be linked to create eye-catching, synchronised shows in Automated or Sound mode. Wireless non-DMX control is possible using the optional IRC-6 remote.



Optional IRC-6 Remote

Intimidator Spot 110

Small but mighty, the compact Intimidator Spot 110 is a lightweight LED moving head prefect for modest mobile applications. It features separate colour and gobo wheels for creative programming but also easy-to-use sound-activated programs for dynamic light shows to sync to the music. Built-in automated programs are also on board the Intimidator Spot 110 and it's easy to generate a synchronised show in Master/Slave mode. Convenient, wireless non-DMX control is available using the optional IRC-6 remote. Fits best in the CHS-40 VIP gear bag.

- DMX Channels: 6 or 12
- Light Source: 1 LED (cool white) 10 W, (2.1 A), 50,000 hours
- Beam Angle: 13°
- Gobos: 7 + open, continuous scroll at variable speeds
- Colours: 7 + white, continuous scroll at variable speeds
- Illuminance: 1,561 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 2.3 kg (5.0 lbs)
- Size: 190 x 127 x 279 mm (7.5 x 5 x 11 in)







- Weight: 4.0 kg (8.8 lbs)
- Size: 207 x 149 x 308 mm (8.2 x 5.9 x 12 in)











Optional IRC-6 Remote

Intimidator Beam 355

Intimidator Beam 355 is a powerful and feature-packed moving head beam fitted with a 100 W LED. Easily generate complex looks using the fixed gobo wheel that includes a unique animation effect to create additional dramatic looks. A rotating 3-facet prism splits the beam to cover larger areas. The motorised frost filter converts the beam to a wash. The onboard full-colour display is IRC-6 compatible and features Totem mode and onboard memory for storing a scene. Intimidator Beam 355 has powerCON®-compatible power input/output connections for power linking.




Intimidator Wash Zoom 450 is a powerful moving head wash fitted with twelve 25 W quad-colour RGBW

LEDs and a motorised zoom for short or long-throw applications. Other convenient features include a Totem

mode that keeps beams aimed at the dance floor and eye-catching auto programs with zone control. Wireless

(non-DMX) control is possible using the optional IRC-6 remote. Up to four fixtures can be linked to create synchronised

- DMX Channels: 8 or 14
- Light Source: 1 LED (white) 100 W, (27 A), 50,000 hours
- Beam Angle: 3°
- · Gobos: 5 + open, animation effect, continuous scroll at variable speeds
- Colours: 8 + white, split colours, continuous scroll at variable speeds
- Prism: 3-facet round, bidirectional rotation at variable speeds
- Illuminance: 262,800 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 11.6 kg (25.4 lbs)
- Size: 322 x 220 x 480 mm (12.7 x 8.7 x 18.9 in)





DMX Channels: 14 or 29

Optional IRC-6 Remote

Intimidator Wash Zoom 450

shows in automated, sound and master/slave modes.

- Light Source: 12 LEDs (guad-colour RGBW) 20 W (3.7 A), 50,000 hours
- Zoom Angle (motorised): 7° to 34°
- Illuminance (7°): 21,560 lux @ 2 m
- Illuminance (34°): 2,320 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Power and Current: 219 W, 1.9 A @ 120 V, 60 Hz
- Power and Current: 207 W, 1 A @ 230 V, 50 Hz
- Weight: 7.2 kg (15.8 lbs)
- Size: 194 x 277 x 363 mm (7.6 x 10.9 x 14.3 in)











- DMX Channels: 7 or 11 Light Source: 1 LED (white) 60 W (2.3 A), 50,000 hours Beam Angle: 15° Gobos: 7 + open (5 metal + 2 glass), rotating, interchangeable, slot-n-lock, continuous scroll at variable speeds Gobo Size: 23.9 mm outside, 20.5 mm image, 1 mm max. thickness Colours: 8 + white, split colours, continuous scroll at variable speeds Prism: 3-facet round, static Illuminance: 9,110 lux @ 2 m Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging) Weight: 4.6 kg (10 lbs) Size: 430 x 255 x 147 mm (16.9 x 10 x 5.7 in)



Optional IRC-6 Remote

Intimidator Scan 305

Intimidator Scan 305 features a bright 60 W LED and a crisp 3-facet prism that allows you to split the beam and cover larger areas. Link up to four fixtures to create synchronised shows in automated, sound or master/slave mode. Save time running cables and extension cords. Minimise programming time using built-in movement macros and move-in-black features. For easy non-DMX operation, control it with the optional IRC-6 remote. Fits best in the CHS-40 VIP Gear Bag.



Intimidator Scan 110

Optional IRC-6 Remote

Small and mighty moving beam power! Intimidator Scan 110 is an extremely compact and lightweight LED scanner perfect for mobile applications. Energise any dance floor with fast and precise movements using either sound-activated programs that dance to the beat of the music or convenient, wireless non-DMX control using an optional IRC-6 remote. Intimidator Scan 110 is a time saver too! Built-in movement macros and move-in-black features make programming fast and easy and you can save time running cables and extension cords by power linking multiple units as well. Fits best in the CHS-40 VIP gear bag.







- DMX Channels: 5 or 11
- Light Source: 1 LED (cool white) 10 W, (2 A), 50,000 hours
- Beam Angle: 13°
- Combined Colour/gobo combinations: 8 patterns + open
- Illuminance: 1,110 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 2.1 kg (4.6 lbs)
- Size: 190.5 x 119.3 x 269 mm (7.5 x 4.7 x 10.6 in)





Photo by: AUVICOM

Freedom Everywhere 100% battery-operated and DMX wireless fixtures

1

FC

Freedom Par Hex-4 (See page 14)



FC

Freedom Flex H4 IP (See page 14)



Freedom Par Quad-4 IP (See page 14) FC





Freedom Par Tri-6 (See page 15)





Anti-glare shield

434

Built-in adjustable kickstand

.....

Built-in threaded hole for easy mounting

CHS-FR4 VIP Gear Bag (sold separately) Freedom Par Hex-4



The Freedom Par Hex-4 is the most colourful model in the next generation of

the Freedom Par family. It has four 10 W RGBAW+UV LEDs for that extra punch

and the special effects that white and UV add to colour mixing. The Freedom Par

Hex-4 has a special limiter option for extending battery life so that when you use

more than 4 colours you know you'll get a good long show!







Freedom Flex H4 IP

Freedom Flex H4 IP features a guick-change battery pack for easy battery charges and changes making this 100% wireless, battery-operated par with a built-in D-Fi transceiver even more flexible and powerful. Freedom Flex H4 IP has hex-colour (RGBAW + UV) LED technology for unlimited colour mixing capabilities. The fixture is temporary outdoor-rated and has a robust housing that repels water, snow, dirt, and sand for all-weather applications. Freedom Flex H4 IP has multiple wireless triggering and control options via the FlareCON Air and the FlareCON app and it works in master/slave mode with any Freedom Par. System includes 6 Freedom Flex H4. Charging Road Case and 6 Freedom Flex batteries.

- DMX Channels: 6. 8 or 12
- Light Source: 4 LEDs (hex-colour RGBAW + UV) 10 W. (2 A), 50,000 hours
- Beam Angle: 23°
- Field Anale: 34°
- Illuminance: 2.163 lux @ 2 m
- Maximum Run Time (all on): up to 8 hours Maximum Run Time (single colour): up to 20 hours
- IP Rating: IP54 Weight: 8.8 lbs (4 kg)
- Size: 5.7 x 5.4 x 8 in (145 x 138 x 204 mm)





- Light Source: 4 LEDs (hex-colour RGBAW+UV) 10 W (2 A), 50,000 hours
- Beam Angle: 23°
- Illuminance: 1.372 lux @ 2 m
- Maximum Run Time (all on): 8 hours
- Maximum Run Time (single colour): 20 hours

Credit: Sounds Alive Entertainments Lincoln

- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 2.9 kg (6.2 lbs)

14

• Size: 138 x 145 x 184 mm (5.4 x 5.7 x 7.2 in)



Freedom Flex Battery

- Battery Type: Li-ion Battery Capacity: 11 Ah
- Battery Voltage: 11.1 VDC
- Quantity of Cells: 15
- Rechargeable: Yes
- Watt Hours: 122.1 Wh
- Lithium Content: 131.6 g
- Weight: 1 kg (2.2 lbs)
- Size: 127.83 x 53.16 x 132.62 mm (5 x 2 x 5.22 in)



Freedom Par Quad-4 IP

Freedom Par Quad-4 IP is a 100% TRUE wireless, battery-operated, guad-colour (RGBA) LED Par with built-in D-Fi transceiver. Its temporary outdoor-rated robust housing repels water, snow, dirt, and sand for all-weather applications and is available in black or white. Freedom Par Quad-4 IP works in Master/Slave mode with first-generation Freedom Pars and it has multiple wireless triggering and control options via the FlareCON Air and the FlareCON app. Convenient, wireless non-DMX control is available using the IRC-6 Remote and customised colours can be created using the built-in LED display. Shine light where it is needed using the built-in adjustable kickstand and prevent light spillage with the built-in glare shield.

Freedom Par Tri-6 is powerful, bright, and truly 100% wireless with a rechargeable battery and a built-in D-Fi transceiver. Freedom Par Tri-6 has 18 W of RGB colour mixing and can be operated with the control panel, the included CHAUVET DJ IRC-6 remote, or from any mobile phone or tablet running the FlareCON mobile app. Freedom Par Tri-6 fits perfectly inside TRUSST and all other 12" box truss. and travels safely and stylishly in the CHAUVET DJ CHS-FR4 VIP Gear Bag.



DMX Channels: 4, 6 or 10

- Light Source: 4 LEDs (guad-colour RGBA) 5 W, (2 A), 50,000 hours
- Beam Angle: 15°
- Illuminance: 2,464 lux @ 2 m
- IP Rating: IP54
- Maximum Run Time (all on): 8 hours
- Maximum Run Time (single colour): 20 hours
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 3.6 kg (8 lbs)
- Size: 145 x 138 x 191 mm (5.7 x 5.4 x 7.5 in)











uiii i

100%

FC

Freedom H1

IRC-6 Remote Included



Freedom Par Tri-6



 DMX Channels: 3, 4, 5 or 9 Light Source: 6 LEDs (tri-colour RGB) 3 W (600 mA), 50,000 hours Beam Angle: 15° Illuminance: 1.938 lux @ 2 m

- Maximum Run Time (all on): 8 hours
- Maximum Run Time (single colour): 20 hours
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 2.6 kg (5.8 lbs)
- Size: 138 x 145 x 184 mm (5.4 x 5.7 x 7.2 in)





Freedom H1 is a compact 100% TRUE wireless, battery-operated, LED wash

light with a built-in D-Fi transceiver. The fixture features a single hex-colour

(RGBAW+UV) 10 W LED. Its magnetic base makes it easy to mount the light to

most metal surfaces providing added versatility. The included magnetic gel holder

allows for quick swapping of filters. Because of its small size, Freedom H1 features

effortless transport and set-up. Freedom H1 has a digital display for easy control

and adjustment of all settings. Multiple control options include stand-alone mode,

wireless DMX or IR. The Freedom H1 X4 system includes 4 Freedom H1. 4

- DMX Channels: 6, 8 or 12
- Light Source: 1 LED (hex-colour RGBAW+UV) 10 W, (3 A), 50,000 hours
- Beam Angle: 21°
- Illuminance (w/ filter): 268 lux @ 2 m
- Illuminance (w/o filter): 314 lux @ 2 m
- Maximum Run Time (all on): up to 8 hours
- Maximum Run Time (single colour): up to 20 hours
- Input Voltage: 8.4VDC, 1.35A (external power supply: 100-240 VAC, 50/60 Hz)
- Weight: 0.7 kg (1.4 lbs) single unit
- Size: 97 x 75 x 139 mm (3.8 x 3 x 5.5 in) single unit





IRC-6 Remote Included

Freedom 01N

Freedom Q1N is a battery-powered RGB+WW pin spot fixture with a built-in D-fi transceiver. Part of the 100% TRUE wireless Freedom ecosystem. Freedom Q1N can be controlled remotely and programmed in sync with other Freedom products. This compact and powerful fixture features a narrow beam perfect for highlighting special event elements. Its magnetic base and small size means effortless mounting, controlling, and transporting. Freedom Q1N is available in either black or white housing making it suitable for any event. The Freedom Q1N system includes 4 fixtures, a carry bag, multi-charger, and IRC-6 remote.



- DMX Channels: 4, 6 or 10
- Light Source: 1 LED (guad-colour RGB+WW) 6 W, (2 A), 50,000 hours
- Beam Angle (w/o filter) : 8°
- Illuminance (w/o filter): 1,700 lux @ 2 m
- Illuminance (w/ filter): 415 lux @ 2 m
- Maximum Run Time (all on): up to 8 hours
- Maximum Run Time (single colour): up to 15 hours
- Input Voltage: 8.4 VDC, 1.3 A (external power supply: 100-240 VAC, 47/63 Hz)
- Weight: 0.6 kg (1.4 lbs)
- Size: 97 x 75 x 139 mm (3.8 x 3 x 5.5 in)





NEW

Freedom Centerpiece

covers, and elevate the elegance of your table setting.





NEW `

Freedom Cvc



Freedom Cyc is a 100% TRUE wireless, battery-operated cyclorama light that surfaces with a wide, even wash never before

seen in a fixture of its size. Its unique lens design perfectly mixes the RGB+WW colour spectrums. Freedom Cyc can be used

on battery power or connected to electrical mains for even greater output! Being part of the Freedom family of 100% wireless

products, Freedom Cyc can be controlled remotely and works in Master/Slave with other Freedom fixtures. The unit has

FC

100%

NEW





Freedom Centerpiece is an elegant 100% TRUE wireless, battery-operated uplight to highlight centerpiece event elements.

Match any decor with this robust base uplight made to support large floral arrangements, featuring 3 varied sized rings of

39 LEDs. Freedom Centerpiece is outdoor-rated, meaning table spills are of no concern to party planners, and its polarised

lenses eliminate unwanted glare for event guests! Wirelessly control the complete 4-pack system, including black housing

- DMX Channels: 6, 8, 10, 12 or 16
- Light Source (ring 1): 12 LEDs (quad-colour RGBW) 0.2 W (0.018 mA) 50,000 hours
- Light Source (ring 2): 7 LEDs (guad-colour RGBW) 0.2 W (0.018 mA) 50,000 hours
- Light Source (ring 3): 20 LEDs (dual-colour CW/WW) 0.1 W (0.018 mA) 50,000 hours
- Beam Angle: 23°
- Illuminance: 510 lux @ 1 m
- IP Rating: IP54
- Weight: 1.3 kg (3 lbs)
- Size: 237.9 x 237.9 x 32.5 mm (9.4 x 9.4 x 1.3 in)



- DMX Channels: 4, 6 or 10
 - Light Source: 16 LEDs (4 red, 4 green, 4 blue, 4 warm white) 48 W total (3.5 A), 50,000 hours

multiple wireless control options via FlareCON, IRC-6, or DMX using a D-Fi transmitter.

- Beam Angle: 52°
- Maximum Run Time (all on): up to 8 hours
- Maximum Run Time (single colour): up to 20 hours
- Recharge Time: 5 hours
- Colour Temperature Range: 2800 to 6500 K
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 3.3 kg (7.2 lbs)
- Size: 191.2 x 148.2 x 138 mm (7.5 x 5.8 x 5.4 in)












FC

IRC-6 Remote Included

Freedom Wedge Quad

The Freedom family of CHAUVET DJ fixtures means 100% TRUE wireless, battery-operated products with built-in D-Fi[™] transceivers to send and receive wireless DMX signals. Freedom Wedge Quad harnesses that power into a triangularly shaped guad-colour LED wash light designed to fit inside triangular truss systems. The light has a built-in adjustable leg to shine light where it's needed, and Freedom Wedge Quad can be attached to 35 mm truss without the need for brackets using M10 or M12 threaded rig points. Create any colour without DMX by using the built-in digital display or easily control static colours and automated programs with the included IRC-6 remote.



 DMX Channels: 4, 6, 10 Light Source: 3 LEDs (guad-colour RGBA) 6 W, (2.4 A), 50,000 hours Beam Angle: 19° Maximum Run Time (all on): up to 8 hours Maximum Run Time (single colour): up to 20 hours Recharge Time: 5 hours Illuminance: 1,144 lux @ 2 m

- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 1.8 kg (3.8 lb)
- Size: 117 x 117 x 166.5 mm (4.4 x 4.4 x 6.6 in)



IRC-6 Remote Included

Freedom Gobo IP


NEW

Inclement weather? No power? No problem! Effortlessly customise special event spaces with monograms, logos, and more indoors or outdoors with Freedom Gobo IP. A member of the Freedom family of products, Freedom Gobo IP is a 100% TRUE wireless, battery-operated cool white LED Gobo Projector with built-in D-Fi transceiver. The unit features a rugged die cast aluminum housing that is temporary outdoor-rated and robust enough to repel water, snow, dirt, and sand for all-weather applications. Convenient, wireless non-DMX control is possible using the IRC-6 remote. Freedom Gobo IP has built-in dimming curves for smooth LED fading and is fan-less for silent operation.



- DMX Channels: 1 or 3
- Light Source: 1 LED (cool white) 16 W, (1.2 A), 50,000 hours
- Colour Temperature: 6000 K
- Gobo Size (E): 37.5 mm outside, 24.0 mm image, 1.0 mm max thickness
- Beam Angle (narrow): 16°
- Beam Angle (wide): 31°
- Illuminance (narrow): 3135 lux @ 2 m
- Illuminance (wide): 1002 lux @ 2 m
- Maximum Run Time: 8 hrs
- IP Rating: IP-54
- Weight: 2.5 kg (5.4 lbs)
- Size: 293 x 118 x 201 mm (11.5 x 4.6 x 7.9 in)



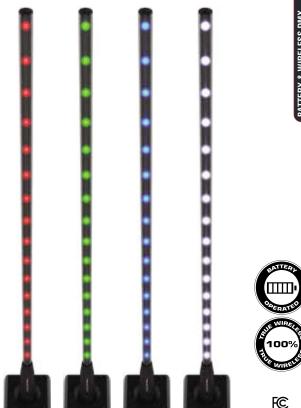

Each LED can be pixel-mapped for ultimate show

and programming creativity

Freedom Stick

ייוווו

100%

FCC.

- DMX Channels: 3, 8, 48 or 50
- Light Source: 32 SMD LEDs (tri-colour RGB) 0.2 W (50mA), 50,000 hours
- Coverage Angle: 360°
- Maximum Run Time (single colour): up to 20 hours
- Maximum Run Time (all on): up to 8 hours
- Weight: 1.6 kg (3.5 lbs)
- Size: 161 x 161 x 1550 mm (6.3 x 6.3 x 61 in) with base



Freedom Stick Pack

Includes: 4 Freedom Sticks, 1 Multi–Charger, 1 IRC-6 Remote and 1 Carrying Bag.





Lain or Shine Indoors and Outdoors






Freedom Flex H4 IP

The Freedom Flex H4 IP is a temporary outdoor IP-54 rated fixture with a robust housing that repels water, snow, dirt, and sand for all-weather applications.

For full specs (See page 19)





- IP Rating: IP54

- Weight: 3.6 kg (8 lbs)









FC

Freedom Par Quad-4 IP is a 100% wireless, battery operated, guad-colour (RGBA) LED wash light with a built-in D-Fi transceiver and a robust housing that repels water, snow, dirt, and sand during outdoor events. Multiple wireless control options are available via the FlareCON Air and the FlareCON app or with the point-and-shoot IRC-6 remote. Freedom Par Quad-4 IP also works in master/slave mode with first-generation Freedom fixtures.



- DMX Channels: 4, 6, or 10 • Light Source: 4 LEDs (quad-colour RGBA) 5 W, (2 A), 50,000 hours Beam Angle: 15°
- Illuminance: 2.464 lux @ 2 m
- Maximum Run Time (all on): 8 hours
- Maximum Run Time (single colour): 20 hours
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Size: 145 x 138 x 191 mm (5.7 x 5.4 x 7.5 in)





Charge multiple units with the Freedom Flex H4 IP X6

IRC-6 Remote Included

Freedom Flex H4 IP

Freedom Flex H4 IP features a guick-change battery pack for easy battery charges and changes making this 100% wireless, battery-operated par with a built-in D-Fi transceiver even more flexible and powerful. Freedom Flex H4 IP has hex-colour (RGBAW + UV) LED technology for unlimited colour mixing capabilities. The fixture is temporary outdoor-rated and has a robust housing that repels water. snow, dirt, and sand for all-weather applications. Freedom Flex H4 IP has multiple wireless triggering and control options via the FlareCON Air and the FlareCON app and it works in master/slave mode with any Freedom Par. System includes 6 Freedom Flex H4, Charging Road Case and 6 Freedom Flex batteries.



Festoon 2 RGB

Festoon 2 RGB is a décor string lighting system that replicates the feel of vintage event lighting. For full specs, see page 36.



- DMX Channels: 6, 8 or 12
- Light Source: 4 LEDs (hex-colour RGBAW + UV) 10 W, (2 A), 50,000 hours
- Beam Angle: 23°
- Field Angle: 34°
- Illuminance: 2,163 lux @ 2 m
- · Maximum Run Time (all on): up to 8 hours
- Maximum Run Time (single colour): up to 20 hours
- IP Rating: IP54
- Weight: 4 kg (8.8 lbs)
- Size: 145 x 138 x 204 mm (5.7 x 5.4 x 8 in)







Festoon 2 EXT RGB increases the length of the Festoon 2 RGB to achieve longer runs. For full specs, see page 36.





EVE E-50Z

EVE E-50Z is an LED ellipsoidal that shines a hard-edged, warm white spot and features D-Fi USB compatibility for wireless master/slave or DMX control. Manual zoom gives you the flexibility to project from any distance and its framing shutters let you easily alter and control the projected beam. EVE E-50Z includes holders for glass and steel gobos as well as a gel frame. You can operate EVE E-50Z in standalone mode eliminating the need for DMX control and you can save time running extension cords by power linking multiple units.

- DMX Channels: 1 or 3
- Light Source: 1 LED (warm white) 50 W, (1.3 A), 50,000 hours
- Colour Temperature: 3,500 K
- Gobo Size: D
- (53.3 mm outside, 43 mm image, 2 mm max. thickness)
- Zoom Angle (manual): 20° to 39°
- Illuminance (20°): 7,910 lux @ 2 m
- Illuminance (39°): 2,710 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 4.2 kg (9.2 lbs)
- Size: 480 x 157 x 381 mm (18.9 x 6.2 x 15 in)







EVE F-50Z

EVE F-50Z is a powerful warm white 50 W Fresnel fixture, perfect for theatrical, worship and broadcast installations. It features D-Fi USB compatibility for wireless master/slave or DMX control. Included barn doors and gel frame let you shape and colour the beam for the perfect spot. EVE F-50Z has a locking power connector and its smooth dimming capabilities make it great for video applications. EVE F-50Z is easily controllable via DMX.

- DMX Channels: 1 or 3
- Light Source: 1 LED (warm white) 50 W, (1.3 A), 50,000 hours
- Colour Temperature: 3,500 K
- Zoom Angle (manual): 17° to 50°
- Illuminance (50°): 998 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- CRI: 92
- Weight: 3.9 kg (8.4 lbs)
- Size: 281 x 212 x 328 mm (11.1 x 8.3 x 13 in)



Gel Frame Included





EVE TF-20


EVE TF-20 is a compact, energy efficient, soft edge LED accent luminaire that can function as a regular PAR can, while its classic Fresnel style emulates stage and theatrical lighting. Conveniently included barn doors block light from unwanted areas, letting you focus on a particular space or object. Thanks to its CCR (Constant Current Reduction) LED dimming, it works seamlessly with conventional dimmers, and is flicker-free in filmed productions. EVE TF-20 is MET certified and is suited for new or retrofit installations with the included track adaptor. The unit is suited for mobile use right out of the box using its standard power cord.

- Light Source: 1 COB LED (warm white) 20 W, (0.5 A), 50,000 hours
- Colour Temperature: 2,700 K
- Beam Angle: 24°
- Illuminance: 1,506 lux @ 2 m
- Input Voltage: 85 to 120 VAC, 50/60 Hz (auto-ranging)
- CRI: 91
- Weight: 1.2 kg (2.6 lbs)
- Size: 153.5 x 140 x 184 mm (6 x 5.5 x 7.2 in)
- Compatible Track: Type H




Gel Frame Included





- - Illuminance (17°): 4,780 lux @ 2 m







EVE P-100 WW

Warm, bright and even wash is at hand with EVE P-100 WW, a high output warm white (3500 K) wash light designed for mobile and installation applications. It includes interchangeable magnetic lenses to alter the beam to desired angles. EVE P-100 WW features a built-in gel frame holder and handy 61/4-inch accessory slot to hold barn doors. Its fanless design ensures 100% silent operation making it great for quiet applications. High-frequency LED dimming eliminates flicker making EVE P-100WW great for video and broadcast applications. D-Fi USB compatibility is on board for wireless master/slave or DMX control as well as powerCON®-compatible power input/output connections for power linking. Sturdy cast aluminum housing provides extra strength without the weight. EVE P-100WW fits best in the CHS-40 VIP gear bag.

- DMX Channels: 1, 2 or 4
- Light Source: 1 COB LED (warm white) 100 W. (2.7 A). 50.000 hours
- Accessory Holder/Gel Frame Size: 6.25 in (158.75 mm)
- Beam Angle: 25°, 35°, or 53°
- Field Angle: 40°, 50°, or 80°
- Illuminance (25°): 7,920 lux @ 2 m
- Illuminance (35°): 4,340 lux @ 2 m
- Illuminance (53°): 1,469 lux @ 2 m (no lens installed)
- Colour Temperature: 3500 K
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- CRI: 98

22

- Weight: 3.5 kg (7.6 lbs)
- Size: 220 x 245 x 305 mm (8.6 x 9.65 x 12 in)





(Sold Separately)





EVE P-130 RGB

EVE P-130 RGB is a robust RGB wash light designed for mobile lighting entertainers. Interchangeable magnetic lenses are included to alter the beam to desired angles. EVE P-130 RGB has a sturdy cast aluminum housing that provides extra strength without added weight. D-Fi USB compatibility is also onboard providing the option for wireless master/slave or DMX control as well as powerCON®-compatible power input/output connections for power linking. Its fanless design ensures 100% silent operation and the unit's high-frequency LED dimming offers flicker-free operation perfect for video use. EVE P-130 RGB fits best in the CHS-40 VIP gear bag.

- DMX Channels: 3 or 9
- Light Source: 40 LEDs (13 red, 13 green, 14 blue) 130 W total, (2.5 A), 50,000 hours
- Accessory Holder/Gel Frame Size: 6.25 in (159 mm)
- Beam Angles: 25°, 35° or 45°
- Field Angles: 45°, 55° or 65°
- Illuminance (25°): 2190 lux @ 2 m
- Illuminance (35°): 1100 lux @ 2 m (no lens installed)
- Illuminance (45°): 727 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 3.5 kg (7.6 lbs)
- Size: 220 x 245 x 305 mm (8.6 x 9.6 x 12 in)





Optional Barn Door Included magnetic lenses (Sold Separately)



(MET)

EVE P-140 VW

Included Gel Frame

(MET)

EVE P-140 VW is a variable white wash light featuring cool white, warm white and amber LEDs. EVE P-140 VW is a D-Fi USB compatible fixture providing the option to control the fixture wirelessly in master/slave mode or with DMX control as well as powerCON®-compatible power input/output connections for power linking. This sturdy wash light has a built-in gel frame holder and a 6 $\frac{1}{4}$ – inch accessory slot to hold optional barn doors. EVE P-140 VW comes with 25° and 45° interchangeable lenses that attach magnetically to alter the beam for added lighting flexibility. EVE P-140 VW fits best in the CHS-40 VIP gear bag.

- DMX Channels: 3 or 9
- Light Source: 40 LEDs (13 cool white, 13 warm white, 14 amber) 140 W total, (2.4 A), 50.000 hours
- Accessory Holder/Gel Frame Size: 6.25 in (159 mm)
- Beam Angles: 25°, 35° or 45°
- Field Angles: 45°, 55° or 65°
- Illuminance (25°): 2,490 lux @ 2 m
- Illuminance (35°): 1,245 lux @ 2 m [no lens installed]
- Illuminance (45°): 806 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- CRI: 77
- Weight: 3.5 kg (7.6 lbs)
- Size: 220 x 245 x 305 mm (8.6 x 9.6 x 12 in)





Optional Barn Door (Sold Separately)



Included magnetic lenses



Optional Barn Door (Sold Separately)

EVE P-150 UV is a brawny blacklight cannon fitted with 40 UV LEDs emitting 150 W of blacklight power. The unit is designed without a fan and its silent operation combined with its flicker-free output make it ideal for video use. EVE P-150 UV is D-Fi USB compatible giving users the option to control the light wirelessly in master/slave mode or wireless DMX control as well as powerCON®-compatible power input/output connections for power linking. 25° And 45° magnetic lenses to adjust the beam are included along with a gel frame holder and accessory slot for optional barn doors. EVE P-150 UV fits best in the CHS-40 VIP gear bag.







EVE P-150 UV

 DMX Channels: 1 or 5 Light Source: 40 LEDs (UV) 150 W total, (2 A), 50,000 hours Accessory Holder/Gel Frame Size: 6.25 in (159 mm) Wavelength: 395 nm Coverage Angle: (narrow lens): 25° (no lens): 35° (wide lens): 45° Input Voltage: 100 to 240 VAC. 50/60 Hz (auto-ranging) Weight: 3.5 kg (7.6 lbs) Size: 220 x 245 x 305 mm (8.6 x 9.6 x 12 in)





Included magnetic lenses



SlimPAR Pro Powerful Wash Lighting





Optional IRC-6 Remote and D-Fi USB Transceiver

SlimPAR Pro Q USB

SlimPAR Pro Q USB is a high-powered quad-colour (RGBA), low-profile wash light with D-Fi USB compatibility for wireless control. Dynamic and natural-looking amber LEDs provide expanded colour mixing capabilities. PowerCON®-compatible power input/output connections provide sturdy and secure power linking. SlimPAR Pro Q USB has built-in dimming curves to simulate halogen filaments. Added light spill control is possible because the fixture is compatible with most 7.5" barn doors.





SlimPAR Pro H USB is designed for any application that calls for a high-power, low-profile LED wash light with precise colours. Features include D-Fi USB compatibility for wireless control. SlimPAR Pro H USB has no moving parts and is flicker-free so it is ideal for quiet and on-camera applications. PowerCON®-compatible power input/ output connections provide sturdy and secure power linking. SlimPAR Pro H USB has built-in dimming curves to simulate halogen filaments. Generate a broad spectrum of colours and achieve natural-looking colour temperatures with 6-in-1 LED technology.



- DMX Channels: 4, 5 or 10
- Light Source: 12 LEDs (quad-colour RGBA) 6 W (2 A), 50,000 hours
- Beam Angle: 16°
- Illuminance: 5,690 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 3.3 kg (7.2 lbs)
- Size: 253 x 98 x 290 mm (10 x 3.9 x 11.4 in)





- DMX Channels: 6, 7 or 12
- Light Source: 12 LEDs (hex-colour RGBAW+UV) 10 W (2.4 A), 50,000 hours
- Beam Angle: 24°
- Illuminance: 3,218 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging) • Weight: 3.3 kg (7.2 lbs)
- Size: 253 x 98 x 290 mm (10 x 3.9 x 11.4 in) (KUI)) (MANABLE (MANABLE) (MANABLE) (MANABLE) (MANABLE (MANABLE) (MANABLE)



BTAir[™]

Control right from your phone or tablet straight to your lights! No additional hardware needed!

- Bluetooth compatibility: V4.2 (or greater)
- Minimum Operating System (Android): Lollipop (V5)
- Minimum Operating System (Apple): iOS 8



Patent Pending

26



The Bluetooth[®] word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Chauvet & Sons, LLC is under license. Other trademarks and trade names are those of their respective owners.



EZLink Par Q1BT (page 27)

EZLink Par Q6BT (page 28)



Bluetooth[®] Compatible Fixtures



COLORband Q3BT (page 27)



EZLink Par Q4BT (page 27)



SlimPAR Q12BT (page 28)



COLORband T3BT (page 29)



SlimPAR T12BT (page 28)







4BAR LTBT (page 29)





Beam Angle: 15°

NEW Patent Pending



NEW Patent Pending

Bluetooth

Patent Pending

<table-of-contents> Bluetooth

liiiii i

BTAir™ Compatible FC





BTAir[™] Compatible **F**€

EZLink Par Q1BT

Optional IRC-6 Remote

EZLink Par Q1BT is an extremely compact battery-powered quad-colour (RGBA) wash light with built-in Bluetooth[®] wireless technology. Control EZLink Par Q1BT from the free BTAir smartphone app with no additional hardware needed! Easily warm sticks of TRUSST or bring the tightest spaces to light with EZLink Par Q1BT's magnetic base. EZLink Par Q1BT features a single RGBA LED for rich colour mixing including punchy amber.



- Light Source: 1 LED (guad-colour RGBA) 5 W, (500 mA), 50,000 hours
- Illuminance: 355 lux @ 2 m
- Maximum Run Time (all on): up to 8 hours
- Maximum Run Time (single colour): up to 20 hours
- Recharge Time: 6 hours
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 0.4 kg (0.8 lbs)
- Size: 111.5 x 89 x 130 mm (4.4 x 3.5 x 5.1 in)
- Bluetooth Version: 4.2



FC BTAir™ Compatible Optional IRC-6 Remote

COLORband Q3BT

COLORband Q3BT is a full-size linear quad-colour (RGBA) wash light fitted with 3 zones of control. This linear wash light features DMX + built-in Bluetooth® wireless technology. Control COLORband Q3BT with the free BTAir app from any smartphone or tablet; no additional hardware needed! Quad-colour LEDs allow for vibrant and warm colour mixing! Access built-in automated programs via Master/Slave, DMX, or optional IRC-6 remote. Power link multiple units to save time running extension cords.

EZLink Par Q4BT

Optional IRC-6 Remote

CHAUVET DJ makes creating exhilarating lighting easy with EZLink Par Q4BT. This battery-powered quad-colour (RGBA) LED Par fixture has Bluetooth® wireless technology built in, allowing you to control EZLink Par Q4BT with the free BTAir app from any smartphone or tablet. No additional hardware needed! Genuine amber LEDs included with quad-colour lights like EZLink Par Q4BT provide richly vibrant and warm colour mixing or natural-looking colour temperatures. Other convenient control options include the IRC-6 remote and sound-activated or automated programs. EZLink Par Q4BT fits best in the CHS-40 VIP Gear Bag.



- DMX Channels: 4, 6 or 16
- Light Source: 12 LEDs (guad-colour RGBA) 4 W, (1.4 A), 50,000 hours
- Beam Angle: 42°
- Illuminance: 635 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Max Unobstructed Distance: 150 ft (45.7 m)
- Weight: 3.1 kg (6.6 lbs)
- Size: 1000 x 98 x 140 mm (39.3 x 3.8 x 5.5 in)

COMPATELE



- DMX Channels: 4 or 8
- Light Source: 4 LEDs (guad-colour RGBA) 3 W, (952 mA), 50,000 hours
- Beam Angle: 15°
- Illuminance: 2,826 lux @ 2 m
- Maximum Run Time (all on): up to 8 hours
- Maximum Run Time (single colour): up to 20 hours
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Max Unobstructed Distance: 150 ft (45.7 m)
- Weight: 1.3 kg (2.8 lbs)
- Size: 145 x 145 x 143 mm (5.7 x 5.7 x 5.6 in)
- Bluetooth Version: 4.2







EZLink Par 06BT

Battery-powered lighting just got even more convenient with EZLink Par Q6BT, a 100% TRUE wireless battery-operated Par with built-in Bluetooth® wireless technology. Harness the colour-mixing power of this versatile fixture with six quad-colour (RGBA) LEDS, including genuine amber, right from any smartphone or tablet—no additional hardware needed! Imagine the ability to wash smaller event spaces with dynamic lighting displays, using the free BTAir smartphone app. EZLink Par Q6BT allows you convenient wireless non-DMX control using the IRC-6 remote or through sound-activated and automated programs. Fits best in the CHS-40 VIP Gear Bag.

SlimPAR 012BT

SlimPAR Q12BT is a compact wash light with built-in Bluetooth® wireless technology that allows you to control the light from any smart phone or tablet without the need for any additional hardware. SlimPAR Q12BT features 12 guadcolour (RGBA) LEDs that generate a broad spectrum of colours and achieve natural-looking colour temperatures. Easily set static colours or automated programs with the optional IRC-6 remote or create eve-catching effects with sound-activated and automated programs. Download the BTAir app for free from your favorite online app store.

SlimPAR T12BT

SlimPAR T12BT makes remote light control easy with its on-board Bluetooth® wireless technology. Download the BTAir app for free from your favorite app store and enjoy the ultra-convenient ease of controlling SlimPAR T12BT right from your smart phone or tablet. SlimPAR T12BT has 12 tri-colour (RGB) LEDs and its compact design easily fits inside sticks of truss making it perfect for truss warming. An optional IRC-6 remote can also be used for control as well as DMX, automated and sound-activated programs.





- DMX Channels: 4 or 8
- Light Source: 6 LEDs (quad-colour RGBA) 3 W, (900mA), 50,000 hours
- Beam Angle: 19°
- Illuminance: 1.268 lux @ 2 m
- Maximum Run Time (all on): up to 8 hours
- Maximum Run Time (single colour): up to 20 hours
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Max Unobstructed Distance: 150 ft (45.7 m)
- Weight: 1.7 kg (3.6 lbs)
- Size: 206.6 x 244 x 86 mm (8 x 9.6 x 3.4 in)
- Bluetooth Version: 4.2

28



- DMX Channels: 4 or 12
- Light Source: 12 LEDs (quad-colour RGBA) 3.5 W, (1.5 A), 50,000 hours

Photo by: Victor Cervantes, IVC Producciones, Cartagena, Colombia

- Beam Angle: 17°
- Illuminance: 3,650 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Max Unobstructed Distance: 150 ft (45.7 m)
- Weight: 1.5 kg (3.3 lbs)
- Size: 279 x 275 x 74 mm (11 x 10.8 x 2.9 in)
- Bluetooth Version: 4.2



- DMX Channels: 3 or 7
- Light Source: 12 LEDs (tri-colour RGB) 2.5 W, (1 A), 50,000 hours
- Beam Angle: 21°
- Illuminance: 2,850 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Max Unobstructed Distance: 150 ft (45.7 m)
- Weight: 1.2 kg (2.6 lbs)
- Size: 264 x 214 x 76.9 mm (10.3 x 8.4 x 3 in)
- Bluetooth Version: 4.2







Patent Pending

HH

Æ

BTAir[™] Compatible

Patent Pending



Tripod, Carrying Bag and Wireless Footswitch included BTAir™ Compatible

🚯 Bluetooth

4BAR LTBT

D-Fi USB Transceiver

COLORband T3BT

Optional IRC-6 Remote

COLORband T3BT is a compact linear wash light with built-in Bluetooth® wireless technology. With the BTAir app, COLORband T3BT can be controlled remotely from any smart phone or tablet without any additional hardware. Download BTAir for free from your favorite online app store. COLORband T3BT has 12 tri-coloured (RGB) LEDs and 3 zones of control to create amazing automated effects. Access built-in automated programs via optional IRC-6 Remote. master/slave or DMX.

4Bar LTBT is a convenient pack-n-go system that, not only sets up and tears down in seconds, but is now easier than ever to control. On-board Bluetooth® wireless technology means you can create and control dynamic lighting looks directly from a smartphone or tablet, without any additional hardware, using the free BTAir app. If that weren't convenient enough, 4Bar LTBT also has D-Fi USB compatibility for wireless Master/Slave and DMX control. You can achieve total room or stage coverage with four individually adjustable heads, and you can create even larger coordinated light shows with other 4BAR fixtures in master/slave mode.



 DMX Channels: 3, 5 or 13 • Light Source: 12 LEDs (tri-colour RGB), 2.5 W (1 A) 50,000 hours Beam Angle: 42° Illuminance: 548 lux @ 2 m Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging) Max Unobstructed Distance: 150 ft (45.7 m) Weight: 3 kg (6.6 lbs) Size: 1000 x 98 x 140 mm (39.3 x 3.8 x 5.5 in) Bluetooth Version: 4.2





- DMX Channels: 3, 5 or 15
- Light Source: 12 LEDs (tri-colour RGB) 3 W, (1 A), 50,000 hours
- Beam Angle: 12°
- Illuminance: 2,382 lux @ 2 m (per pod)
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 3.5 kg (7.8 lbs)
- Size: 918.1 x 95 x 274.3 mm (36.1 x 3.7 x 10.8 in)
- Bluetooth Version: 4.2
- Max Unobstructed Distance: 150 ft (45.7 m)









Optional IRC-6 Remote and D-Fi USB Transceiver

COREpar 40 USB

COREpar 40 USB produces a full spectrum of light with the unsurpassed colour mixing of COB (chip-on-board) technology. Includes a separate magnetic lens to provide the flexibility to go from an ultra-wide wash to a narrow beam in seconds. High frequency LED dimming achieves smooth LED fades and ensures a flickerfree performance in video applications. Multiple control options include DMX, master/slave and sound activation modes as well as wireless control thanks to D-Fi USB compatibility. Point-and-shoot operation of static colours and automated programs is also possible with the optional IRC-6 remote control.



Optional IRC-6 Remote and D-Fi USB Transceiver

COREpar 80 USB

COREpar 80 USB produces a full spectrum of light with the unsurpassed colour mixing of COB (chip-on-board) technology. Includes a separate magnetic lens to provide the flexibility to go from an ultra-wide wash to a narrow beam in seconds. High frequency LED dimming achieves smooth LED fades and ensures a flicker-free performance in video applications. Multiple control options include DMX, master/slave and sound activation modes as well as wireless control thanks to D-Fi USB compatibility. Point-and-shoot operation of static colours and automated programs is also possible with the optional IRC-6 remote control.

Optional IRC-6 Remote and D-Fi USB Transceiver

COREpar UV USB

COREpar UV USB is a compact UV wash with COB (chip-on-board) LED technology, offering D-Fi USB compatibility for wireless master/slave or DMX control. It includes a separate magnetic lens to provide the flexibility to go from an ultra-wide wash to a narrow beam in seconds. High frequency LED dimming achieves smooth LED fades and ensures a flicker-free performance in video applications. Multiple control options include DMX, master/slave and sound activation modes as well as wireless control thanks to D-Fi USB compatibility.

Sit-flat housing

for easy cable access

Optional IRC-6 Remote and D-Fi USB Transceiver

COLORband PiX USB

COLORband PiX USB is a linear LED wash light that functions as a pixel mapping effect, blinder or wall washer. It features D-Fi USB compatibility for wireless master/slave or DMX control. Pixel mapping functions mean you can create amazing animations and video effects. Access to multiple pre-built programs is available with or without DMX. The fixture's highpower, tri-colour LEDs nearly eliminate multicolour shadows and its high-frequency LED dimming lets you achieve flickerfree operation suitable for video applications. Save time running cables and power cords by power linking multiple units. COLORband PiX USB is ideal for guiet applications due to its silent operation and no moving parts. Control of static colours and automated programs is easy with the optional IRC-6 remote. Fits best in the optional CHS-60 VIP Gear Bag.





- DMX Channels: 3 or 8
- Light Source: 1 COB LED (tri-colour RGB) 40 W (2 A), 50,000 hours
- Beam Angle: 40° (without lens)
- Beam Angle: 20° (with lens)
- Illuminance: 243 lux @ 2 m (without lens)
- Illuminance: 1.660 lux @ 2 m (with lens)
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 1.6 kg (3.4 lbs)
- Size: 132 x 189 x 242 mm (5.2 x 7.4 x 9.5 in)



- DMX Channels: 3 or 8
- Light Source: 1 COB LED (tri-colour RGB) 80 W (2 A), 50,000 hours
- Beam Angle: 70° (without lens)
- Beam Angle: 25° (with lens)
- Illuminance: 405 lux @ 2 m (without lens)
- Illuminance: 2.143 lux @ 2 m (with lens)
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 2 kg (4.2 lbs)
- Size: 200 x 143 x 253 mm (7.9 x 5.6 x 10 in)



- DMX Channels: 1 or 5
- Light Source: 1 COB LED (UV) 70 W (1.5 A), 50,000 hours
- Wavelength: 390 to 400 nm
- Beam Angle: 100° (without lens)
- Beam Angle: 50° (with lens)
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Size: 139 x 200 x 253 mm (5.5 x 7.9 x 10 in)















D-Fi USB Transceiver **COLORband PiX-M USB**

Optional IRC-6 Remote and

COLORband PiX-M USB, a moving LED strip light, is a versatile wall-wash light that can create dynamic sweeping, chase, animation and blinder effects thanks to its rotating base, pixel-mapping capabilities, and the ability to control each of its 10 LEDs separately. Its motors allow you to angle the light where it's needed. COLORband Pix-M USB features D-Fi USB compatibility for wireless master/slave or DMX control but you can also access dramatic, pre-built automated programs with or without DMX. Wireless, non-DMX operation is also available with the optional IRC-6 remote.



• DMX Channels: 3, 4, 6, 7, 8, 9, 12, 18, 36 or 41 Light Source: 12 LEDs (tri-colour RGB) 3 W (1,000 mA), 50,000 hours Beam Angle: 27° Illuminance: 2,245 lux @ 2 m Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging) Weight: 1.8 kg (4 lbs) Size: 987 x 49 x 157 mm (38.9 x 2 x 6.2 in)



- DMX Channels: 5, 6, 8, 10, 17, 32 or 36
- Tilt: 245°
- Light Source: 10 LEDs (tri-colour RGB) 9 W, (2A), 50,000 hours
- Beam Angle: 20°
- Illuminance: 6,120 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 4.4 kg (9.6 lbs)
- Size: 785 x 67 x 123 mm (31 x 2.6 x 4.8 in)



245° Rotating LED Strip Light



SlimBANK T18 USB

SlimBANK T18 USB is a powerful wash light with 18 tricolour (RGB) LEDs that achieve smooth colour mixing. Adjustable barn doors help direct and focus the light. Convenient control options include auto and soundactivation programs as well as DMX. USB compatibility provides fast and easy wireless options.



Optional IRC-6 Remote and D-Fi USB Transceiver

SlimPAR H6 USB

SlimPAR H6 USB is a low-profile RGBAW+UV LED wash light with D-Fi USB compatibility for wireless master/ slave or DMX control. It also works in sound-active mode. Built-in dimming curves provide smooth LED fading, and the 6-in-1 LED technology generates a broad spectrum of natural-looking colours. Precise colours can also be created with the built-in LED display. Point-and-shoot operation of static colours and automated programs is possible with the optional IRC-6 remote. Compact designed, it works as a truss warmer.

Optional IRC-6 Remote and D-Fi USB Transceiver


SlimPAR Q6 USB

SlimPAR Q6 USB is a low-profile, high-output quadcolour (RGBA) LED wash light that features 6 LEDs and D-Fi USB compatibility for instant wireless connectivity. It is controllable via master/slave. DMX. standalone modes or the optional point-and-shoot IRC-6 remote. It also features multiple user-configurable settings. SlimPAR Q6 USB creates natural-looking colour temperatures thanks to punchy amber LEDs. Its flicker free operation makes it well suited for video productions. With no moving parts, it is ideal for applications where silence is essential.



SlimPAR Q12 USB

SlimPAR Q12 USB is a low-profile, high-output quadcolour (RGBA) LED wash light with D-Fi USB for instant wireless connectivity. It is controllable via master/ slave. DMX, standalone modes or the optional pointand-shoot IRC-6 remote. It also features multiple userconfigurable settings. SlimPAR Q12 USB creates naturallooking colour temperatures thanks to punchy amber LEDs. Its flicker free operation makes it well suited for video productions. With no moving parts, it is ideal for applications where silence is essential. Multiple units can be power linked to save time running cables and extension cords. Fits best in the CHS-30 VIP Gear Bag.



- DMX Channels: 3, 5, 9 or 13
- Light Source: 18 LEDs (tri-colour RGB) 3 W (1,050 mA), 50.000 hours
- Beam Angle: 17°

32

- Illuminance: 4.120 lux @ 2 m
- Input Voltage: 100 to 240 VAC. 50/60 Hz (auto-ranging)
- Weight: 3.6 kg (7.8 lbs)
- Size: 395 x 55 x 260 mm (15.5 x 2.1 x 10.2 in)





Light Source: 6 LEDs (hex-colour RGBAW+UV) 10 W (2.4 A),

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

• Size: 211 x 91.5 x 244 mm (8.3 x 3.6 x 9.6 in)

ACTIVATED (((,,,,))) ((,,,)) ((,,,)) ((,,))

• DMX Channels: 6, 8 or 12

Illuminance: 747 lux @ 2 m

Weight: 1.6 kg (3.4 lbs)

50.000 hours

Beam Angle: 23°

- DMX Channels: 4 or 9
- Light Source: 6 LEDs (quad-colour RGBA) 4 W (0.9 A), 50.000 hours
- Beam Angle: 19°
- Illuminance: 2.684 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 1.6 kg (3.4 lbs)
- Size: 212 x 92 x 244 mm (8.3 x 3.6 x 9.6 in)





- DMX Channels: 4 or 9
- · Light Source: 12 LEDs (quad-colour RGBA) 4 W (0.8 A), 50.000 hours
- Beam Angle: 17°
- Illuminance: 4.960 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 2.2 kg (4.8 lbs)
- Size: 247 x 92 x 293 mm (9.7 x 3.6 x 11.5 in)







- DMX Channels: 3 or 8 • Size: 227 x 84 x 252 mm (8.9 x 3.3 x 9.9 in)
- Light Source: 12 LEDs (tri-colour RGB) 3 W (1 A), 50,000 hours Beam Angle: 15° Illuminance: 3,801 lux @ 2 m Input Voltage: 100 to 240 VAC. 50/60 Hz (auto-ranging) Weight: 1.8 kg (4 lbs)







Optional IRC-6 Remote and D-Fi USB Transceiver

SlimPAR T6 USB

SlimPAR T6 USB is a low profi le, high output tri-colour (RGB) LED wash light with D-Fi USB compatibility for wireless master/slave or DMX control. As versatile as it is dependable, this compact fixture is an ideal truss warmer. Because of its even output, it's also an excellent front light, and its fl icker-free output makes it an ideal light for broadcast/video applications. Tri-colour LEDs virtually eliminate multicoloured shadows. SlimPAR T6 USB has multiple user-confi gurable settings, and built-in automated programs are easily accessed via master/slave or the optional IRC-6 remote. Multiple units can be power linked. The CHS-30 VIP Gear Bag is recommended for transport.

SlimPAR 56

SlimPAR 56 is a LED wash light in a sleek white or black housing. Powered by 108 red, green and blue LEDs, it blends into any décor with ease. Customise light shows in 3- or 7-channel DMX mode. Fits best in the CHS-SP4 VIP Gear Bag.



SlimPAR T12 USB

SlimPAR T12 USB is a high output tri-colour (RGB) LED wash light with D-Fi USB compatibility to allow instant wireless control in DMX or master/slave mode. Tri-colour LEDs virtually eliminate distractive multicoloured shadows. Its even, flicker-free output makes it ideal for front light applications and use in video productions. The optional IRC-6 remote can be used to access automated programs and control static colours. Compact enough to fit inside truss sticks, SlimPAR T12 USB is best transported in the CHS-30 VIP Gear Bag.





- DMX Channels: 3 or 8
- Light Source: 6 LEDs (tri-colour RGB) 3 W (800 mA), 50,000 hours
- Beam Angle: 15°
- Illuminance: 1,621 lux @ 2 m
- Input Voltage: 100 to 240 VAC. 50/60 Hz (auto-ranging)
- Weight: 1.1 kg (2.4 lb)
- Size: 181 x 84 x 226 mm (7.1 x 3.3 x 9 in)





- DMX Channels: 3 or 7
- Light Source: 108 LEDs (36 red, 36 green, 36 blue) 0.25 W (20 mA), 50,000 hours
- Beam Angle: 14°
- Illuminance: 1,337 lux @ 2 m
- Input Voltage: 100 to 240 VAC. 50/60 Hz (auto-ranging)
- Weight: 1 kg (2 lbs)
- Size: 241 x 218 x 54 mm (9.5 x 8.5 x 2.1 in)



Ultimate gig lighting convenience, versatility and power is packed into GigBAR Move, a patented 5-in-1 lighting system that includes moving heads, derbies, washes, a laser and strobe effect pre-mounted on a single bar. That means a IRC-6, Carrying Bag, Tripod Optional IRC-6 Remote and Tripod, Carrying Bag and Tripod Carrying Bag and complete light show is available from this single system that includes a tripod, BTAir™ Compatible D-Fi USB Transceiver Wireless Footswitch included wireless footswitch and FREE carry bags to ensure quick setup. The moving **4BAR LTBT** GiaBAR 2 heads have separate colour and gobo wheels to enhance creative programming possibilities, plus built-in Totem Mode to keep the moving heads focused on the GigBAR 2 is a powerful patented pack-n-go 4-in-1 lighting system including UV 4Bar LTBT is a convenient pack-n-go system that, not only sets up and tears down dance floor. Individual control of each effect ensures your show looks the way in its wash lights and strobes for better colour mixing and effects. GigBAR 2 in seconds, but is now easier than ever to control. On-board Bluetooth® wireless you need it to and events can be energised with dynamic effects like built-in UV includes two LED Derby fixtures, LED wash lights, a laser, and four high-power technology means you can create and control dynamic lighting looks directly from LEDs to illuminate florescent objects and make them pop. Controlling GigBAR LED strobe lights all mounted on one bar. The unit features phenomenal built-in a smartphone or tablet, without any additional hardware, using the free BTAir app. Move is also easy. Stand-alone control, DMX, wireless IRC-6 remote or wireless automated and sound-activated programs including all four effects. You can easily If that weren't convenient enough, 4Bar LTBT also has D-Fi USB compatibility footswitch options are all on board. GigBAR Move is also compatible with GigBAR control the unit from the display, IRC-6 remote control, wireless footswitch or for wireless Master/Slave and DMX control. You can achieve total room or stage 2 in master/slave mode for huge coverage and dynamic light shows. DMX to take your gig to a higher level. Master/slave multiple units and save time coverage with four individually adjustable heads, and you can create even larger running cables and extension cords by power linking multiple units. Get in and coordinated light shows with other 4BAR fixtures in master/slave mode. DMX Channels: 3, 17 or 35 get out guickly with the included tripod, wireless footswitch and free carry bag.

GigBAR Move

way you need it to

.

GigBAR MOVE

0

34

0

5-in-1 patented lighting system that includes moving heads, derbies,

Totem Mode keeps the moving heads focused on the dance floor

Built-in UV LEDs illuminate florescent objects and make them pop

Individual control of each effect ensures your show looks the

washes, a laser and strobe effect pre-mounted on a single bar

- Weight: 10.7 kg (23.4 lbs)





GiaBAR Move

 Light Source (pars): 6 LEDs (quad-colour RGB + UV) 3.5 W (1 A), 50.000 hours Light Source (strobe): 4 LEDs (dual-colour white + UV) 5 W (1.5 A), 50,000 hours Light Source (derby): 6 LEDs (2 red, 2 green, 2 blue) 5 W (1.6 A), 50,000 hours Light Source (moving head): 1 LED (cool white) 10 W (2.3 A), 50,000 hours Light Source (laser): 650nm/100 mW (red) laser diode, 532 nm/30 mW (green) laser diode Beam Angle (moving head): 11°

- Beam Angle (pars): 19°
- Beam Angle (strobe): 8°
- Illuminance (pars): 1,205 lux @ 2 m (per par)
- Illuminance (moving head): 1056 lux @ 2 m (per head)
- Illuminance (strobe): 86 lux @ 2 m (per zone)
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Size: 1100 x 144 x 449 mm (43 x 5.7 x 17.7 in)

- Laser light. Avoid direct eye exposure.
- Class 2M laser product. Classified per IEC / EN 60825-1:2014 Complies with FDA performance standards for laser products except for deviations pursuant to Laser Notice No. 56, dated May 8, 2019



- DMX Channels: 3, 11 or 23
- Light Source: Pars: 6 LEDs (quad-colour RGB + UV) 3.5 W (1A), 50,000 hours Strobe Bar: 4 LEDs (white & UV) 5 W (1.5A), 50,000 hours Derby: 6 LEDs (2 red, 2 green, 2 blue) 5 W (1.6 A), 50,000 hours Laser: 650 nm/100 mW (red) laser diode, 532 nm/30 mW (green) laser diode
- Stand Height: 1.5 to 2.5 m (4.8 ft to 8.3 ft)
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 11.6 kg (25.6 lbs)
- Size: 1185 x 110 x 386.5 mm (46.7 x 4.3 x 15.2 in)

Laser light. Avoid direct eye exposure. Class 3R laser product. Complies with FDA performance standards for laser products except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007





- DMX Channels: 3, 5 or 15
- Light Source: 12 LEDs (tri-colour RGB) 3 W, (1 A), 50,000 hours
- Beam Angle: 12°
- Illuminance: 2,382 lux @ 2 m (per pod)
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 3.5 kg (7.8 lbs)
- Size: 918.1 x 95 x 274.3 mm (36.1 x 3.7 x 10.8 in)
- Bluetooth Version: 4.2
- Max Unobstructed Distance: 150 ft (45.7 m)





Festoon 2 RGB

Festoon 2 RGB is a décor string lighting system that replicates the feel of vintage event lighting. Both the string and individual bulbs are IP54 rated for temporary outdoor use so the colourful warmth of this effect can benefit events indoors or out. Festoon 2 RGB is completely pixel-mappable for ultimate show and programming creativity and the built-in automated programs create complex looks in seconds. The system expands up to 3 strings (60 bulbs) per controller. Access non-DMX control in Standalone mode from the digital display or optional IRC-6.

- DMX Channels: 3. 9. Pixel or Pixel+
- Light Source: 5 SMD LEDs (tri-colour RGB) 0.1 W, (20 mA), 50,000 hours (per bulb)
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- IP Rating: IP54
- Weight (Controller): 1.4 kg (3.6 lbs)
- Size (String): 15,000 x 60 x 133 mm (590.5 x 2.4 x 5.2 in)
- Size (Controller): 184 x 203 x 49 mm (7.25 x 8 x 2 in)





Festoon 2 EXT RGB

Festoon 2 EXT RGB increases the length of the Festoon 2 RGB to achieve longer runs. Set up and connection to an existing Festoon 2 RGB is effortless and Festoon 2 EXT RGB is rated for temporary outdoor use and is perfect for festivals and other exterior events. Festoon 2 EXT RGB fits best in the CHS-50 gear bag.

- Length: 15 m (49 feet)
- IP Rating: IP54

FITS CHS-50

36

- Weight: 3.6 kg (7.8 lbs)
- Size: 15,000 x 60 x 133 mm (590.5 x 2.4 x 5.2 in)



Optional IRC-6 Remote

Obsession

NEW

Get obsessed with breathtaking mid-air effects from Obsession, the compact LED effect light that projects ever-changing, multicoloured rotating gobos. Separate colour and gobo wheels allow you to blanket the room with ever-changing patterns. Generate synchronised shows in Master/Slave mode with built-in automated programs or use other control options like stand-alone, or DMX modes, or optional IRC-6 remote control. Power linking capabilities save time running cables. Obsession fits best in the CHS-40 VIP Gear Bag.

Optional IRC-6 Remote

Wash FX 2

Wash FX 2 is a multi-purpose effect light with 18 Quad-colour (RGB+UV) LEDs that can be used as a regular wash light or eye-candy effect with 6 chasing zones. Powerful UV LEDs create a psychedelic blacklight effect and provide brilliant colour-mixing capabilities. Wash FX 2 can be controlled with the wireless IRC-6 Remote for wireless triggering or in stand-alone, DMX, IR or master/slave modes. Fits best in the CHS-40 VIP Gear Bag.



DMX Channels: 7

IRC-6 COMPATIBLE

- Light Source: 1 LED (cool white) 50 W, (1.7 A), 50,000 hours
- Colours: 13 + white, split colours, continuous scroll at variable speeds
- · Gobos: 14 (metal) + open, continuous scroll at variable speeds
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 2.6 kg (5.6 lbs)
- Size: 320 x 210 x 210 mm (12.6 x 8.26 x 8.26 in)







 DMX Channels: 3, 4, 8 or 28 Light Source: 18 LEDs (quad-colour RGB+UV) 6 W, (2 A), 50,000 hours Illuminance: 1.795 lux @ 2 m Beam angle: 40° Field angle: 64° Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging) Weight: 2.6 kg (5.8 lbs) • Size: 310 x 140 x 230 mm (12.2 x 5.5 x 9 in)





Swarm Wash FX

DMX Channels: 2 or 18

• Weight: 4.2 kg (9.2 lbs)

Laser light.

Light Source:

Swarm Wash FX is a 4-in-1 LED effect fixture that combines an RGBAW rotating derby, RGB+UV wash, red/green laser, and a ring of white SMD strobes. Create an endless array of looks by individually controlling each effect via DMX and master/slave modes, or an optional IRC-6 remote. Other features include automated and sound-activated programs and a user-friendly menu structure. Multiple units can be power linked to save time running cables and extension cords. Fits best in the CHS-40 VIP Gear Bag.

Swarm: 5 LEDs (1 red, 1 green, 1 blue, 1 amber, 1 white) 2 W (650 mA) 50,000 hours

Wash: 8 LEDs (quad-colour RGB+UV) 1.5 W (600 mA), 50,000 hours

Laser: 650 nm/100 mW (red) laser diode, 532 nm/30 mW (green) laser diode

Strobe: 12 LEDs (white) 1 W (300 mÅ), 50,000 hours

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

• Size: 335 x 332 x 241 mm (13.1 x 13 x 9.4 in)

Avoid direct eye exposure.

Complies with FDA performance

for deviations pursuant to Laser Notice No. 50, dated June 24, 2007

ACTIVATED ((C))

standards for laser products except



Swarm 5 FX

Swarm 5 FX is a 3-in-1 LED effect fixture that combines red and green lasers, white strobe effects, and multicoloured rotating derby effects into one compact setup. Match the look of any event by creating customised light shows with separate colour and program control. Quickly create a look using built-in automated and sound-activated programs, or master/slave and DMX mode. Create a synchronised light show and save time running cables and extension cords by power-linking multiple units. Fits best in the CHS-40 VIP Gear Bag.



- DMX Channels: 9
- Light Source:

Swarm: 5 LEDs (1 red, 1 green, 1 blue, 1 amber, 1 white) 3 W (300 mA), 50,000 hours Strobe: 8 LEDs (white) 1 W (300 mA), 50,000 hours Laser: 532 nm/50 mW (green) laser diode, 650 nm/100 mW (red) laser diode

- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 4.5 kg (9.8 lbs)
- Size: 248 x 298 x 310 mm (9.75 x 11.7 x 12.2 in)

Laser light.



Avoid direct eye exposure. Complies with FDA performance standards for laser products except for deviations pursuant to Laser Notice No. 50. dated June 24, 2007







Rotosphere Q3

Rotosphere Q3 is an easy to use mirror ball simulator with high-power, quad-colour LEDs. Three LED zones emit up to three different colours simultaneously and the slow speed of rotation creates the perfect atmosphere for slow dancing. Rotosphere Q3 is easily controllable with the optional IRC-6 Remote and the digital display even allows you to set a colour and rotation speed without any controller. Mount Rotosphere Q3 to truss with the included bracket or place it on a stand as a centerpiece.



- DMX Channels: 3. 9. or 19
- Light Source: 5 LEDs (quad-colour RGBW) 7 W, (2.4 A), 50.000 hours
- Coverage Angle: 360°
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 3.9 kg (8.6 lbs)
- Size: 266 x 319 x 419 mm (11 x 13 x 17 in)





Mini Kinta IRC

Mini Kinta is fitted with 3 W LEDs to punch through nearly any ambient lighting or fog. Filling a room floor to ceiling with razor sharp beams, it delivers an output that surpasses those of much larger derby effects. DMX controllable, it also features exciting built-in programs. An optional IRC-6 Remote is available for wireless control. Fits best in the CHS-30 VIP Gear Bag.



Optional IRC-6 Remote

Kinta FX

Kinta FX combines an LED derby effect, laser and SMD strobe in one compact fixture. These effects can be coordinated to create a variety of exciting looks that feature multicoloured derby beams, dynamic strobes and chases plus hundreds of sharp red and green laser beams. Control this versatile fixture easily via DMX, master/slave, optional IRC-6 Remote or its digital display. Multiple units can be power linked to save time running cables and extension cords. Fits best in the CHS-30 VIP Gear Bag.



BOB LED

BOB LED is the hottest simulated flame effect light on the market, but generates no heat. This LED powered, dutycycle free fixture perfectly simulates a flickering cauldron. BOB LED can either stand on included legs or hang from an included chain.



- DMX Channels: 4
- Light Source: 4 LEDs (1 red, 1 green, 1 blue, 1 white) 3 W (980 mA), 50,000 hours
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 1.6 kg (3.4 lbs)
- Size: 261 x 186.5 x 186.8 mm (10.3 x 7.3 x 7.4 in)





- DMX Channels: 2 or 9
- Light Source:
- Kinta: 4 LEDs (1 red. 1 green. 1 blue. 1 white) 7.5 W (2.4 A). 50.000 hours

Strobe: 16 SMD LEDs (white) 5 W (1.6 A), 50,000 hours Laser: 650 nm/100 mW (red) laser diode, 532 nm/30 mW (green) laser diode

- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 1.7 kg (3.8 lbs)
- Size: 187 x 261 x 187 mm (7.4 x 10.3 x 7.4 in)

Laser light. Avoid direct eve exposure.



Complies with FDA performance standards for laser products except for deviations pursuant to Laser Notice No. 50. dated June 24. 2007.





- Light Source: 66 LEDs (54 orange, 12 blue) 0.25 W (20 mA), 100.000 hours
- Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
- Weight (with legs): 2.3 kg (5.1 lbs)
- Size (with legs): 455 x 455 x 775 mm (17.5 x 17.5 x 30.5 in)
- Weight (with chains): 2.2 kg (4.8 lbs)
- Size (with chains): 280 x 280 x 737 mm (11 x 11 x 29 in)

38







Freedom Gobo IP

Inclement weather? No power? No problem! Effortlessly customise special event spaces with monograms, logos, and more indoors or outdoors with Freedom Gobo IP. A member of the Freedom family of products, Freedom Gobo IP is a 100% TRUE wireless, battery-operated cool white LED Gobo Projector with built-in D-Fi transceiver. The unit features a rugged die cast aluminum housing that is temporary outdoor-rated and robust enough to repel water, snow, dirt, and sand for all-weather applications. Convenient, wireless non-DMX control is possible using the IRC-6 remote. Freedom Gobo IP has built-in dimming curves for smooth LED fading and is fan-less for silent operation.

- DMX Channels: 1 or 3
- Light Source: 1 LED (cool white) 16 W, (1.2 A), 50,000 hours
- Colour Temperature: 6000 K
- Gobo Size (E): 37.5 mm outside, 24.0 mm image, 1.0 mm max thickness
- Beam Angle (narrow): 16°
- Beam Angle (wide): 31°
- Illuminance (narrow): 3135 lux @ 2 m
- Illuminance (wide): 1002 lux @ 2 m
- Maximum Run Time: 8 hrs
- IP Rating: IP-54
- Weight: 2.5 kg (5.4 lbs)
- Size: 293 x 118 x 201 mm (11.5 x 4.6 x 7.9 in)





Pinspot Bar

High-output bar with 6 independent pinspots designed to replicate traditional incandescent lamps

- Independent control of each head offers true flexibility and programming capabilities
- High-output bar with 6 independent pinspots designed to replicate traditional incandescent lamps



Pinspot Bar

From creating subtle glows for appetizing buffets to lighting inspiring exhibits and highlighting special event elements, harness pinspotting power with Pinspot Bar. Pinspot Bar is a high-output bar with 6 independent pinspots designed to replicate traditional incandescent lamps. Independent control of each head offers true flexibility and programming capabilities. Achieve a clean and elegant look for any upscale even with only a single PowerCon-compatible power input no messy cables-along with power linking capabilities that save time running cables to other fixtures. Pinspot Bar includes various beam diffusers and CTO filters to help achieve your desired look. A pair of included Omega brackets allow for multiple mounting options including pipe and drape. Control Pinspot Bar via the on-board digital display, DMX, wireless IRC-6 remote. or D-Fi USB donale.

- Beam Angle: 5°
- CRI: 81



Included








Optional IRC-6 Remote and D-Fi USB Transceiver

 DMX Channels: 1. 6 and 11 • Light Source: 6 LEDs (warm white) 15 W, (3.6 A). 50.000 hours Illuminance: 7,707 lux @ 2 m (per pod) Colour Temperature: 4000 K

 Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging) Weight: 4.3 kg (9.4 lbs) Size: 1000 x 119 x 131 mm (39 x 4.6 x 5 in)

2 Omega Brackets







IRC-6 Remote Included

EZpin Pack 4 Accent lighting and pin spotting with battery-powered EZpin Pack 4 makes lighting centerpieces, cakes, and other event space focal-points easier than ever. EZpin Pack 4 bundles four EZpin fixtures and one IRC-6 remote into an easily transportable VIP gear bag; perfect for mobile entertainers and event producers. Each light has a magnetic base that affixes to most metal surfaces, eliminating the need for clamps. No metal surfaces? No problem! Easily attach the lights to drop ceiling supports or air wall frames using CHAUVET DJ Scissor Clip.



- Light Source: 1 LED (cool white) 2 W, (725 mA), 50,000 hours
- Beam Angle: 3°
- Illuminance: 3,112 lux @ 2 m
- Maximum Run Time: up to 10 hours
- Recharge Time: 7 hours
- Colour Temperature: 7100 K
- Included gels: 2700 K and 4000 K
- Input Voltage: 5 VDC, 2.4 A (external power supply: 100 to 240 VAC, 50/60 Hz)
- Bracket Mounting Hole: M10
- Weight: 0.3 kg (0.6 lbs)
- Size: 189 x 70 x 53 mm (7.4 x 2.7 x 2.1 in)

2 variable white gels Included: 2700 K and 4000 K



IRC-6 Remote Included

EZBar

EZBar is a battery-powered bar with three independent warm white pin spots designed to accent event space elements. Each of the three lights can be manually adjusted to different angles to light a variety of subjects. The rechargeable lithium battery allows the fixture to be placed anywhere and provides up to ten hours of run time. The bar features a strong magnet for flexible mounting options to most metal surfaces. An optional wireless IRC-6 remote can set the dimmer and turn the fixture on or off. EZBar also includes wide-angle diffusers for short-throw applications.



LED Pinspot 2

LED Pinspot 2 includes two front focal lens options to produce hard-edged beams for a variety of applications. It weighs less than a pound and is powered by a 3 W white LED. The auto switching power supply allows the fixture to adapt to the voltage provided, ranging from 100 V to 240 V.



- Light Source: 3 LEDs (warm white) 5 W, (1.3 A), 50,000 hours
- Beam Angle: 5° (per pod)
- Field Angle: 10° (per pod)
- Illuminance: 3,898 lux @ 2 m (per pod)
- Maximum Run Time (all on): up to 8 hours
- Recharge Time: 6 hours
- Colour Temperature: 4000 K
- Input Voltage: 15 VDC, 1.6 A
- (external power supply: 100 to 240 VAC, 50/60 Hz)
- Threaded Clamp Hole: M10
- Weight: 1.9 kg (4.2 lbs)
- Size: 358 x 127 x 106 mm (14 x 5 x 4 in)

10° and 25° diffusers Included



- Light Source: 1 LED (cool white) 3 W (700 mA), 50,000 hours
- Beam Angle: 5° (installed), 9° (included)
- Illuminance (5°): 5.700 lux @ 2 m
- Illuminance (9°): 1,335 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 0.4 kg (0.8 lbs)
- Size: 200 x 110 x 150 mm (7.87 x 4.33 x 5.9 in)

Colour Gels Included





Optional D-Fi USB Transceiver

EVE E-100Z

EVE E-100Z is a powerful spot fixture featuring sharp pattern projection with a 100 W warm white LED light source. Features D-Fi USB compatibility for wireless master/slave or DMX control. This versatile fixture works with metal or glass gobos to create incredible gobo or pattern details. The manual zoom and framing shutters make it simple to control beams.

- DMX Channels: 1 or 3
- Light Source: 1 LED (warm white) 100 W (2.3 A), 50,000 hours
- Colour Temperature: 3,500 K
- Gobo Size: M

(66 mm outside, 48 mm image, 2 mm max. thickness)

- Zoom Angle (manual): 14° to 30°
- Illuminance (14°): 15,100 lux @ 2 m
- Illuminance (30°): 3,800 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- CRI: 80
- Weight: 5.7 kg (12.6 lbs)
- Size: 611 x 183 x 430 mm (24 x 7.2 x 16.9 in)





EVE E-50Z

EVE E-50Z is an LED ellipsoidal that shines a hard-edged, warm white spot and features D-Fi USB compatibility for wireless master/slave or DMX control. Manual zoom gives you the flexibility to project from any distance and its framing shutters let you easily alter and control the projected beam. EVE E-50Z includes holders for glass and steel gobos as well as a gel frame. You can operate EVE E-50Z in standalone mode eliminating the need for DMX control and you can save time running extension cords by power linking multiple units.

- DMX Channels: 1 or 3
- Light Source: 1 LED (warm white) 50 W, (1.3 A), 50,000 hours
- Colour Temperature: 3,500 K
- Gobo Size: D
- (53.3 mm outside, 43 mm image, 2 mm max. thickness)
- Zoom Angle (manual): 20° to 39°
- Illuminance (20°): 7,910 lux @ 2 m
- Illuminance (39°): 2,710 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 4.2 kg (9.2 lbs)
- Size: 480 x 157 x 381 mm (18.9 x 6.2 x 15 in)







LED Followspot 75ST

LED Followspot 75ST sheds the spotlight precisely where it needs to be with a focused hard-edge beam and smooth LED dimming. Equipped with a 75 W LED, it features a single gobo slot to project crisp patterns and can also perform electronic strobe effects. It is easy to set up and tear down, and comes with a free tripod. It's the perfect choice as an entry-level followspot for stages, school functions and events where focus needs to be on a speaker or guest of honor.

- DMX Channels: 3
- Light Source: 1 LED (cool white) 75 W (18 A) 50,000 hours
- Zoom Angle (manual): 14° to 20°
- Gobo Size: 23.7 mm outside, 21.3 mm image, 1 mm max. thickness
- Colours: 7 + white
- Illuminance (14°): 8,140 lux @ 2m
- Illuminance (20°): 4,650 lux @ 2 m
- Input Voltage: 120/230 VAC, 50/60 Hz (switchable)
- Weight: 6 kg (13.3 lbs)
- Size: 560 x 276 x 292 mm (22 x 10.8 x 11.5 in)





LED Followspot 120ST


LED Followspot 120ST is a portable, LED followspot that emits a tight beam powered by a bright 120 W LED to highlight actors at far distances. Built-in CTO filter lowers colour temperature to match tungsten lamps. Control options include DMX and manual modes and you can simplify fading with smooth LED dimming. Focus the light where it is needed using the mechanical iris to reduce the beam's diameter and deliver silent operation with fast electronic strobe and no moving parts. Set up and tear down in seconds with the included tripod.

Stand Included

- DMX Channels: 3
- Light Source: 1 LED (cool white) 120 W (30.6 A), 50,000 hours
- Zoom Angle (manual): 14° to 20°
- Colours: 7 + white
- Illuminance (14°): 16,060 lux @ 2 m
- Illuminance (20°): 7,900 lux @ 2 m
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 7.5 kg (16.6 lbs)
- Size: 582 x 279 x 341 mm (22.9 x 11 x 13.4 in)





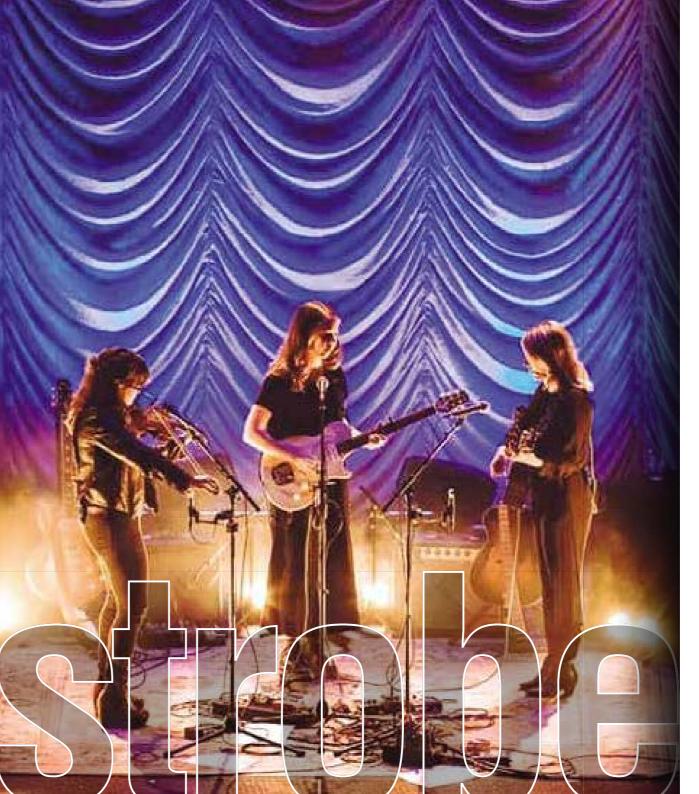



Optional D-Fi USB Transceiver

Shocker 2

Shocker 2 is a punchy dual zone blinder with warm white 85 W COB LEDs. Perfect for theatrical productions, concerts, dance floors and more, Shocker 2 has an included expansion bracket that allows quick attachment of a second unit to create a 4-head blinder. Adjustable pulse width modulation (PWM) control is on board to eliminate flicker on camera. Shocker 2 has PowerCON®-compatible power input/ output connections for power linking up to 4 fixtures and flexible control options with onboard 3- and 5-pin DMX connectors.

- DMX Channels: 1, 2, 4, 7 or 8
- Light Source: 2 COB LEDs (warm white) 85 W, (3.6 A), 50,000 hours
- Beam Angle: 51°
- Colour Temperature: 3200 K
- Illuminance: 1,080 lux @ 2 m (one pod), 2,397 lux @ 2m (both pods)
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 4.7 kg (10.4 lbs)
- Size: 375 x 116 x 153 mm (14.75 x 4.6 x 6 in)



44

-2

Gevser P7





Hurricane Bubble Haze

Multi-purpose atmospheric machine emits bubbles, haze or haze-filled bubbles

Gravity-fed bubble reservoir recirculates unused bubble fluid

• Variable-speed loft fan pushes bubbles up into the air • Built-in cleaning function increases machine longevity and

reducing fluid consumption

reduces clogs

Patent Pending





Wireless Remote Included

Optional WMS Transmitter

Wireless Remote Included

Non-toxic, non-flammable paper confetti refills (Not Included)



Geyser P7 is a dynamic pyrotechnic-like effect that creates thrilling bursts of fog lit with seven 9 W penta-colour (RGBA+UV) LEDs for endless colour capabilities. Two LED zones can create two-tone bursts of fog without the use of any toxic chemicals, fire or heavy CO2 canisters. Control the unit from the built-in DMX or the included Geyser wireless remote and assign different colours to each of the remote's buttons. The onboard digital display allows for easy configuration even in fast-paced or dark environments.

Funfetti Shot

Funfetti Shot is a wirelessly controlled confetti launcher. With easy setup by one person, it sends powerful blasts of confetti flying for distances up to 9 m (30') and covering an area as large as 50 m2 (540 square feet). Each powerful burst of confetti lasts as long as 25 seconds. The launcher can be controlled in manual, wireless and DMX modes. For added versatility, it works with a variety of confetti types including UV. A double-bracketed yoke allows easy floor mounting or hanging. Safe and convenient, Funfetti Shot does not rely on compressed air or CO2.

 DMX Channels: 15 Output: 17.000 cfm Light Source: 7 LEDs (penta-colour RGBA+UV) 9 W (3 A), 50,000 hours Tank Capacity: 0.7 gal (2.5 l) Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz • Weight: 8.5 kg (18.16 lbs) • Size: 400 x 362 x 210 mm (15.7 x 14.2 x 8.2 in)





- DMX Channels: 1
- Maximum Confetti Capacity (FRC and FRU Confetti): 0.25 kg (0.5 lbs)
- Maximum Continuous Launch Duration: 25 s
- Maximum Throw Distance: 9 m (30 ft)
- Average Coverage Area: 50 m² (540 ft²)
- Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
- Weight: 6.2 kg (13.6 lbs)
- Size: 284 x 228 x 553 mm (11.2 x 9 x 21.8 in)







Hurricane Haze 4D

Hurricane Haze 4D is a low profile hazer with an adjustable scoop to direct the haze and a discreet fan. It can be controlled with the included wired timer remote and built-in DMX.

- DMX Channels: 2
- Output: 4,300 cfm
- Tank Capacity: 3.75 I (1 gal)
- Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
- Compatible Fluids: HF5
- Weight: 6 kg (13.2 lbs)
- Size: 277 x 396 x 245 mm (11 x 15.5 x 9.6 in)



Hurricane Haze 1DX

Hurricane Haze 1DX is a compact and lightweight hazer that creates a thin atmosphere to enhance any light show. It features a silent running fan that allows the unit to be used in any environment. Its built-in display lets you quickly and easily set DMX functions and haze standalone settings. Hurricane Haze 1DX has a small footprint allowing the machine to be placed in any location.

- DMX Channels: 1
- Output: 3000 cfm
- Tank Capacity: 1.5 I (0.4 gal)
- Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
- Compatible Fluids: HF5
- Weight: 3.3 kg (7.2 lbs)
- Size: 278 x 150 x 223 mm (11 x 6 x 9 in)



Hurricane 1000

- Tank Capacity: 1 I (0.26 gal)
- Input Voltage: 120 VAC, 60 Hz or 230 V, 50 Hz
- Output: 10,000 cfm
- Compatible Fluids: FF5
- Weight: 2.7 kg (5.8 lbs)
- Size: 301 x 225 x 208 mm (11.9 x 8.9 x 8.2 in)



Optional FC-W, FC-M Receiver and WMS Transmitter

- Hurricane 1200
- Tank Capacity: 1.0 I (0.26 gal)
- Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
- Output: 18,000 cfm
- Compatible Fluids: FF5
- Weight: 2.9 kg (6.4 lbs)
- Size: 286 x 235 x 209 mm (11.3 x 9.3 x 8.2 in)



Hurricane 1600

- DMX Channels: 1
- Tank Capacity: 2.4 I (0.63 gal)
- Input Voltage: 120 VAC, 60 Hz or 230 V, 50 Hz
- Output: 25,000 cfm
- Compatible Fluids: FF5
- Weight: 6 kg (13.2 lbs)
 Size: 348 x 312 x 253 mm (13.7 x 12.3 x 10 in)



Hurricane 700

- Tank Capacity: 0.6 I (0.2 gal)
- Input Voltage: 120 VAC, 60 Hz or 230 V, 50 Hz
- Output: 1,500 cfm
- Compatible Fluids: FF5, CF250
- Weight: 1.4 kg (3 lbs)
- Size: 218 x 149 x 167 mm (8.6 x 5.9 x 6.6 in)

Remote Included

FC-T Included

Cumulus is an event ready low-lying fog machine that creates thick clouds that hug the floor without the need for dry ice. The onboard ultrasonic agitator converts distilled water into a thin mist. The unit's fast heat up time allows for quick operation and fog on demand. It's rugged flight case makes transportation a breeze and locking casters prevent accidental rollaways. Cumulus can be controlled with the on board digital display or DMX.

- DMX Channels: 2
- Tank Capacity: Fog Fluid Tank Capacity: 3.25 I (0.9 gal)
- Water Tank Capacity: 7.6 I (2 gal)
- Heat-up Time: 3 min
- Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
- Fog Fluid Consumption: 12 ml/min
- Water Consumption: 120 ml/min
- Compatible Fluids: HFG, FJU, HDF, QDF
- Weight: 26.7 kg (58.9 lbs)
- Size: 625 x 409 x 453 mm (25 x 16 x 18 in)

Nimbus



Nimbus is an event ready dry ice machine that delivers thick, low-lying clouds of fog that hugs the floor and dissipates without rising. It provides an outstanding return on investment to rental houses and event producers, and is ideally suited for a wedding party's first dance. This powerful machine heats enough water to create fog from 10 pounds (4.5 kg) of dry ice to provide six minutes of run time. Output and flow are easily controlled, due to an adjustable multi-level control arm. Dual heaters ensure faster heat-up and recycle times. A low water sensor increases safety.

- Tank Capacity: 17 I (4.5 gal)
- Heat-up Time (single element): 50 min
- Heat-up Time (dual element): 30 min
- Reheat Time (single element): 30 min
- Reheat Time (dual element): 15 min
- Average Runtime: 6 min
- Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
- Dry Ice Capacity: 4.5 kg (10 lbs)
- Weight (full): 34 kg (75 lbs)
- Size: 513 x 465 x 470 mm (20 x 18 x 19 in)



Nimbus Cart

Easily transport your Nimbus dry ice machine to and from the car and around the dance floor.

- Load Capacity: 34 kg (75 lbs)
- Weight: 2.7 kg (5.8 lbs)
- Size: 426 x 379 x 132 mm (16.7 x 14.9 x 5.5 in)

Hurricane Bubble Haze

Hurricane Bubble Haze takes party atmospherics to new levels. It's a haze machine. It's a bubble machine. It's both at the same time! This multi-purpose patent pending atmospheric machine emits bubbles, haze, or even haze-filled bubbles, and its always-ready technology lets the unit run continuously to keep the party going. Hurricane Bubble Haze features a gravity-fed bubble reservoir that recirculates unused bubble fluid reducing fluid consumption. A built-in cleaning function increases machine longevity and reduces clogs. Hurricane Bubble Haze is compatible with HF5 and BF5 fluid.

Bubble King (B-550)

Bubble King is the biggest name in bubble effects, featuring three double wands, a manual bubble button, and extremely high output. This is the perfect machine when you need bubbles for a large area.

- Tank Capacity: 1.7 | (56 oz)
- Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
- Weight: 5.9 kg (13.2 lbs)
- Size: 483 x 381 x 305 mm (19 x 15 x 12 in)

DMX Channels: 4

CONTINUOUS

 (\mathbf{f})

- Tank Capacity: 0.8 | (0.21 gal) each
- Input Voltage: 120 VAC. 60 Hz or 230 VAC. 50 Hz
- Output: 10.000 cfm
- Compatible Fluids (haze): HF5
- Compatible Fluids (bubble): BF5
- Weight: 9.2 kg (20.2 lbs)
- Size: 310 x 312 x 394 mm (12.2 x 12.3 x 15.5 in)



Atmospheric Fluids



Low Lying Fog Fluid

High Performance Bubble Fluid



Atmospheric Remotes



Wired Timer Remote (FC-T)

Compatible with Hurricane 1800 Flex. Hurricane Haze 4D. Hurricane Haze 2D. Hurricane 1600. Hurricane 1302. Hurricane 1200. Hurricane 1000 and SM-250.



Wireless Motion Sensor (WMS) Compatible with Gevser P5. Gevser P7. Funfetti Shot. Hurricane 1800 Flex, Hurricane 1600, Hurricane 1302, Hurricane 1200, Hurricane 1000, SM-250.



Wireless Remote (FC-W) Compatible with Hurricane 1800 Flex. Hurricane 1600. Hurricane 1302. Hurricane 1200. Hurricane 1000. Funfetti Shot, SM-250.





High Performance Fog Fluid High Performance Haze Fluid





QDF5 Quick Dissipating Fluid

CF250 Fog Machine Cleaning Fluid

Hex-LED Technology

The trillion colour difference

A CHAUVET DJ Hex-LED fixture is much more than a blacklight. It creates not only intense Ultra Violet light but also superb colours and white uplighting washes.

Create and mix unique UV colours

SlimPAR H6 USB (See page 32)

FC Freedom Par Hex-4 (See page 14)

100%





Freedom H1 (See page 15)

100%

SlimPAR Pro H USB (See page 25)







COREpar UV USB

COREpar UV USB is a compact UV wash with COB (chip-on-board) LED technology, it offers D-Fi USB compatibility for wireless master/slave or DMX control. It includes a separate magnetic lens to provide the flexibility to go from an ultra-wide wash to a narrow beam in seconds. High frequency LED dimming achieves smooth LED fades and ensures a flicker-free performance in video applications. Multiple control options include DMX, master/slave and sound activation modes as well as wireless control thanks to D-Fi USB compatibility.

DMX Channels: 1 or 5

• Light Source: 1 COB LED (UV) 70 W (1.5 A), 50,000 hours Coverage Angle: 100° without Fresnel lens, 50° with Fresnel lens • Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging) Weight: 2.1 kg (4.6 lbs) • Size: 139 x 200 x 253 mm (5.5 x 7.9 x 10 in)





Optional D-Fi USB Transceiver

EVE P-150 UV

EVE P-150 UV is a brawny blacklight cannon fitted with 40 UV LEDs emitting 150 watts of blacklight power. The unit is designed without a fan and its silent operation combined with its flicker-free output make it ideal for video use. EVE P-150 UV is D-Fi USB compatible giving users the option to control the light wirelessly in master/slave mode or wireless DMX control. 25° and 45° magnetic lenses to adjust the beam are included along with a gel frame holder and accessory slot for optional barn doors.

- DMX Channels: 1 or 5
- Light Source: 40 LEDs (UV) 150 W total, (2 A), 50,000 hours
- Coverage Angle: (narrow lens): 25° (no lens): 35°(wide lens): 45°
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 3.5 kg (7.6 lbs)
- Size: 220 x 245 x 305 mm (8.6 x 9.65 x 12 in)







BTAir Light Easier

-0

FlareCON



Patent Pending

BTAir™

Control right from your phone or tablet straight to your lights! No additional hardware needed!

- Bluetooth compatibility: V4.2 (or greater)
- Minimum Operating System (Android): Lollipop (V5)
- Minimum Operating System (Apple): iOS 8



FlareCON

FlareCON app is available for both Android and iOS® in both phone and tablet versions. The FlareCON Air can also connect directly to a DMX controller to send wireless signals out to an unlimited number of D-Fi lights or receivers.



Passa Passa Mast



MENU ENTER UP DOWN

CHAUVETZ

FlareCON Air 2 is a Compact, 100% TRUE wireless Wi-Fi™ receiver and wireless

D-Fi transmitter in a single unit. The unit has a built-in battery, generates its own

Wi-Fi[™] network, and can be used anywhere with no internet or hotspot needed!

FlareCON Air 2 is compatible with both Android[™] and Apple[®] operating systems

for smartphones and tablets. Wirelessly control an unlimited number of D-Fi-ready

fixtures and receivers simultaneously. You can even control non-D-Fi-enabled

fixtures using the included cable adapter. Navigation of FlareCON Air 2 is easy

with the on-board text readout and OLED digital display. The unit is fully FCC/RTTE

compliant and has a built-in hook and loop fastener for direct mounting to truss.



FC





NEW

Xpress-Rack 1024 is a rackmount DMX interface for ShowXpress[™] software. The unit controls 2 DMX universes and unlocks an additional ArtNet universe (3 universes total). Easily store and play back 16 shows without a computer using onboard buttons or included remote. Trigger up to 8 scenes remotely using the Phoenix contacts. Xpress-Rack 1024 features a built-in clock and calendar which triggers scenes automatically. Xpress-Rack 1024 is hot-swappable and automatically re-connects within seconds. Compatible with Windows® and Mac OS X systems. Connect multiple interfaces to control additional universes. Both outputs are electrically and optically isolated.

- Max Unobstructed Distance (Wi-Fi™): 100 ft (30.5 m)
- Max Unobstructed Distance (D-Fi[™]): 600 ft (183 m)
- Input Voltage: 5 VDC, 1.6 A (external power supply: 100 to 240 VAC, 50/60 Hz)
- Weight: 0.3 kg (0.6 lbs)

DMX Channels: 512

Antenna connection: RP-SMA

NEW

FlareCON Air 2

• Size: 158 x 83 x 24 mm (6.2 x 3.3 x 0.9 in)

Operating Frequency: 2.412 to 2.484 GHz

COMPARE (INFINITE) (INFINITE) (INFINITE) (INFINITE)



52



ShowXpress is a free software program that turns almost any computer into a lighting console. It allows direct control over simple PAR cans to the most complex moving lights. All you need is a computer (PC or Mac), a ShowXpress interface and ShowXpress software. The software is now available as an app for your smartphone. You can take ShowXpress on the road and go mobile! Pre-configured for RGB, RGBA, RGBW, and RGBWA fixtures, Pixels makes the creation of show-stopping effects fast and easy, and is included free as a part of your ShowXpress software. For more information go to:

https://www.chauvetdj.com/showxpress/

Xpress-Rack 1024

 Input Voltage: 5 V USB Weight: 1.3 kg (2.8 lbs) • Dimensions: 483 x 76 x 44 mm (19 x 3 x 1.75 in)



Xpress-1024

Harness the power of ShowXpress lighting control software with Xpress-1024 DMX interface. This self-contained aluminum unit is compatible with both Windows and Mac OS X systems, but will easily store and play back 1 show without a computer. Xpress-1024 controls two DMX universes and unlocks an additional ArtNet universe (3 universes total). The interface is hot-swappable and automatically re-connects within seconds. Connect multiple interfaces to control additional universes. Xpress-1024 has built-in optical isolation and ground loop protection circuits.

2000

- DMX Channels: 1024 + 512 via ArtNet
- Input Voltage: 5 V USB
- Weight: 0.2 kg (0.4 lbs)
- Dimensions: 110 x 66 x 45 mm (4.3 x 2.6 x 1.8 in)

NEW

Xpress-512S

Xpress-512S is a powerful DMX interface that lets you control ShowXpress lighting control software on either Windows® and Mac OS X systems. You can easily store and play back 1 show without a computer. This self-contained, aluminum unit controls up to two DMX universes - one full DMX universe and an additional ArtNet universe. Adding additional universes is easy by connecting additional interfaces. Xpress-512S is hot-swappable and automatically reconnects within seconds. The unit also has built-in electrostatic discharge and ground loop protection circuits.

- DMX Channels: 512 + 512 via ArtNet
- Input Voltage: 5 V USB
- Weight: 0.1 kg (0.2 lbs)
- Dimensions: 74 x 35 x 35 mm (2.9 x 1.4 x 1.4 in)

D-Fi USB The world's first and only D-Fi USB transceiver



Wirelessly connect to all CHAUVET DJ USB-enabled fixtures using the patent pending D-Fi USB transceiver, which eliminates the need for any DMX cables. The USB transceiver is powered directly from the fixture. Control your USB fixtures using any of our wireless controllers, or from your smartphone with the D-Fi Hub and FlareCON.





EVE P-140 VW

(page 22)





EVE P-100 WW (page 23)

D-Fi USB Compatible Fixtures







COLORband PiX USB (page 31)



COLORband PiX-M USB (page 31)

EVE P-150 UV (page 22)

CONTROLI



SlimPAR Q12 USB (page 32)

SlimPAR Q6 USB (page 32)



SlimPAR T12 USB (page 33)

SlimPAR Pro Q USB (page 25)



COREpar 40 USB (page 30)



EVE E-100Z (page 21)



SlimPAR H6 USB (page 32)



EVE E-50Z (page 21)



COREpar 80 USB (page 30)



SlimBANK T18 USB (page 32)



COREpar UV USB (page 30)



SlimPAR Pro H USB (page 25)



EVE F-50Z (page 21)



IRC-6

IRC-6 is an easy-to-use infrared remote control (IRC) for all CHAUVET DJ IRC-enabled lighting fixtures. It provides instant access to pre-programmed scenes, colour mixing options, and on-the-fly speed adjustments. This compact and lightweight remote has an approximate range of 30 feet (9 m). IRC-6 compatible fixtures also include the EZ and Freedom series fixtures and many more!

Max. Unobstructed Distance: 4.6 m (15 ft)

- Input Voltage: 3 VDC lithium battery (CR2025)
- Weight: 20 g (0.7 oz)
- Size: 100 x 47 x 7 mm (3.9 x 1.8 x 0.3 in)



Obey 70

Obey 70 bridges the gap between smaller rack mount controllers and massive control desks. Fourteen reversible faders and an assignable joystick allow for easy programming of up to twelve 32-channel fixtures. Obey 70 can store up to six sets of chases containing 240 scenes on 384 total channels of control. It also features fog and strobe control, as well as MIDI compatibility.

- DMX Channels: 384
- Input Voltage: 9 VDC, 500 mA (external power supply: 100 to 240 VAC, 50/60 Hz)
- Weight: 3.3 kg (7.3 lbs)
- Size: 483 x 178 x 71 mm (19 x 7 x 2.8 in)





DMX-AN 2

NEW

DMX AN2 is a multi-purpose Art-Net/sACN node that converts 1 Ethernet cable to 2 DMX universes. Its optical and electrical isolation is ready for any situation and the durable Neutrik® etherCON® in/through port ensures reliability. The built-in web-based GUI means no universe/subnet setup. DMX-AN2 automatically redirects the web page if the IP address is changed. The unit supports Power over Ethernet (POE) or an external power supply. Both outputs can be set to either Art-Net or sACN and DMX-AN2 functions as an Art-Net to DMX or DMX to Art-Net interface. Onboard LED indicators quickly inform status and the integrated mounting bracket is included to quickly install into any location.

- DMX Channels: 1024
- DMX Connectors: 3- pin XLR
- Control Protocol: Art-Net. DMX. sACN
- Art-Net Version: 3
- Input Voltage (DC): 9 VDC, 500 mA (external power supply: 100 to 240 VAC, 50/60 Hz)

Obey 40

DMX Channels: 192

Weight: 2.6 kg (5.7 lbs)

Input Voltage: 9 VDC, 500 mA

- Input Voltage (POE): 48V 0.4 A
- Weight: 0.2 kg (0.4 lbs)

Data Stream 4 is a universal DMX-512 optical splitter

that distributes the incoming DMX signal, in daisy

chain configurations, into four separate outputs with an

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

Size: 120 x 64 x 39 mm (4.7 x 2.5 x 1.5 in)



Obey 40 controls up to twelve 16-channel fixtures. Obey

40 has 30 banks on eight scenes, or up to 240 scenes. It

also offers fog and strobe control and MIDI compatibility.

(external power supply: 100 to 240 VAC, 50/60 Hz)

Size: 483 x 89 x 171 mm (19 x 3.5 x 6.7 in)





Data Stream 8

Data Stream 8 is a flexible DMX splitter designed to distribute and boost incoming DMX signals from dual inputs into 8 separate outputs via a master 3-position switch. Each input can be used simultaneously and sent to any output. Individual 2-position switches can also send data from either the A or B input separately. Each of the outputs is optically isolated from the others providing protection in the event of a short. A threaded insert allows the unit to be safely secured to trussing.

- DMX Connectors: 3-pin XLR
- Rackmount: 1U
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight: 2.1 kg (4.6 lbs)
- Size: 483 x 132 x 44 mm (19 x 5.2 x 1.7 in)





Data Stream 4

additional "thru" port.

Weight: 2.6 kg (5.8 lbs)

Rackmount: 1U

DMX Connectors: 3 and 5-pin XLR

• Size: 483 x 134 x 46 mm (19 x 5.3 x 1.8 in)

 Input Voltage: 9 VDC, 500 mA (external power supply: 100 to 240 VAC, 50/60 Hz) Operating Frequency: 2.412 to 2.484 GHz Weight: 0.6 kg (1.2 lbs) • Size: 142 x 91 x 46 mm (5.59 x 3.58 x 1.81 in)

D-Fi Hub

mounting options.



D-Fi Hub is a wireless transceiver that converts D-Fi to DMX, or DMX

to D-Fi. The D-Fi Hub wirelessly synchronises an unlimited number

of D-Fi-ready lights and products. It turns any DMX controller into a

wireless D-Fi controller, or if you already have a CHAUVET DJ D-Fi

controller, save yourself the trouble of a long DMX run by placing the

D-Fi Hub up in your rig. D-Fi Hub is small and lightweight and has many

















VIP Gear Bag CHS-40 Fits:

Rotosphere Q3 Intimidator Scan 305 IRC Kinta FX Mini Kinta Swarm 5 FX Swarm Wash FX Wash FX 2 And More!



VIP Gear Bag CHS-2XX Fits:

Intimidator Spot 260



VIP Gear Bag CHS-FR4 Fits:

Freedom Par Hex-4 Freedom Par Tri-6 Freedom Par Quad-4 IP

VIP Gear Bag CHS-30

Fits: COREpar 80 USB COREpar 40 USB SlimPAR Pro H USB SlimPAR Pro Q USB SlimPAR H6 USB SlimPAR Q6 USB SlimPAR Q12 USB SlimPAR T6 USB SlimPAR T12 USB COREpar UV USB And More!



VIP Gear Bag CHS-60 Fits: COLORband PiX USB COLORband PiX-M USB And More!

"The CHAUVET name and logo and the other brands and trademarks in this catalog, including, but not limited to, CHAUVET DJ, VIVID, INTIMIDATOR, FREEDOM, EVE, SLIMPAR, SLIMPANEL, COLORBAND, COREPAR, BTAIR, EZLINK, D-FI, D-FI USB, GIGBAR, HURRICANE, GEYSER, NIMBUS, CUMULUS, FUNFETTI, SCORPION, SWARM, ROTOSPHERE, LINE DANCER, KINTA, ABYSS, FLARECON, OBEY and FOOT-C are registered trademarks or trademarks owned by CHAUVET in the U.S. and other countries and may not be used by a third party for any purpose without the prior written consent of CHAUVET."

For complete specifications, visit ChauvetDJ.eu | All products meet CSA and CE standards. Specifications subject to change without notice.



ChauvetDJ.eu



Chauvet Belgium Stokstraat 18, 9770 Kruisem, Belgium

Global Headquarters 5200 NW 108th Avenue Sunrise, FL 33351 USA

California Branch 7555 N. San Fernando Road Burbank, CA 91505 USA

Chauvet México Av. de las Partidas 34 – 3B Zona Industrial Lerma Lerma, Estado de México, CP 52000

Chauvet UK Brookhill Road Industrial Estate Pinxton, Nottingham NG16 6NT, United Kingdom

Chauvet Germany Bruno-Bürgel-Str. 11 28759 Bremen, Germany

Chauvet France 3, Rue Ampère 91380 Chilly-Mazarin, France

Copyright 2020 Chauvet & Sons, LLC.

"The CHAUVET name and logo and the other brands and trademarks in this catalog, including, but not limited to, CHAUVET DJ, VIVID, INTIMIDATOR, FREEDOM, EVE, SLIMPAR, SLIMPANEL, COLORBAND, COREPAR, BTAIR, EZLINK, D-FI, D-FI USB, GIGBAR, HURRICANE, GEYSER, NIMBUS, CUMULUS, FUNFETTI, SCORPION, SWARM, ROTOSPHERE, LINE DANCER, KINTA, ABYSS, FLARECON, OBEY and FOOT-C are registered trademarks or trademarks owned by CHAUVET in the U.S. and other countries and may not be used by a third party for any purpose without the prior written consent of CHAUVET."

For complete specifications, visit ChauvetDJ.eu | All products meet CSA and CE standards. Specifications subject to change without notice.