




4BAR Flex T USB

4BAR Flex T USB is one of the most versatile and convenient pack-n-go lighting systems anywhere. The unit features unmatched flexibility with the addition of [D-Fi™ USB](#) compatibility for wireless master/slave or DMX control. You can maximize setup possibilities and configurations with 2 included L-brackets and the unit mounts to most tripods or speaker stands, without the need for additional clamps, using the pass-through hole. Create the ultimate light show by mounting up to 4 additional fixtures to the top of the 4BAR Flex T USB and provide electricity to the additional lights by using the built-in Edison plugs. Easily set up and tear down in minutes with the included carrying bag and create large, coordinated light shows with other 4BAR fixtures in master/slave mode.

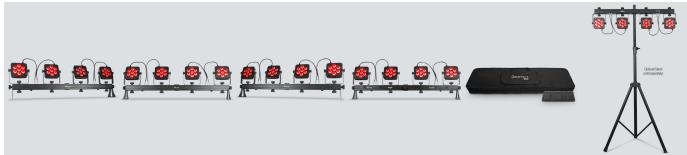

Highlights

- Upgraded version of the popular 4BAR Tri USB increases FLEXibility
- Mounts to most tripods or speaker stands, without the need for additional clamps, using the pass-through hole
- D-Fi™ USB compatibility for wireless master/slave or DMX control
- Create the ultimate light show by mounting up to 4 additional fixtures to the top of the 4BAR Flex
- Provide electricity to the additional lights by using the built-in Edison plugs
- Maximize setup possibilities and configurations with 2 included L-brackets
- Easily set up and tear down in minutes with the included carrying bag
- Multiple control options include standalone, DMX mode, wireless footswitch or the IRC-6
- Safely mounts to truss using built-in bolts
- Create large, coordinated light shows with other 4BAR fixtures in master/slave mode

Specifications

- DMX Channels: 3 or 15
- DMX Connectors: 3-pin XLR
- Light Source: 28 LEDs (tri-color RGB) 3 W, (800 mA), 50,000 hours life expectancy
- Strobe Rate: 0 to 22 Hz
- Beam Angle: 18° (per pod)
- Field Angle: 31° (per pod)
- Fits Tripod Size: 1.2 – 1.5 in (32 – 39mm)
- Illuminance: 2330 lux @ 2 m (per pod)
- Power Linking: 8 units @ 120 V; 16 units @ 230 V
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Power and Current: 64 W, 1 A @ 120 V, 60 Hz
63 W, 0.5 A @ 230 V, 50 Hz
- Weight: 11.6 lb (5.3 kg)
(Controller): 0.8 lb (1.8 kg)
- Size: 47.4 x 5.5 x 14.75 in (1205 x 140 x 374.8 mm)
(Controller): 12.4 x 5.2 x 1.5 in (315 x 131.5 x 37.5 mm)
- Approvals: CE
- Optional Controllers: IRC – 6, D-Fi USB

What's Included

- 4Bar Flex T USB
- Power cord
- Carrying bag
- Wireless Footswitch
- Warranty card
- Quick Reference Guide