




Ground Support

The Ground Support is a proper and safe ground support/stacking system for professional video wall setups. It utilizes the new dual function rig bars to provide a clean, setup for your clients, and is capable of supporting up to 15 video panels of Vivid or F-series Panels. Ships in road case with internal dividers to aid in the fast setup of the system for production/rental events.

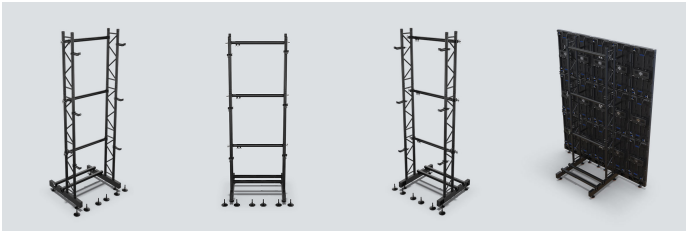

Highlights

- Complete ground support solution for stacking video wall on the floor
- Works for walls between 4.92 ft (1.5 m) and 8.2 ft (2.5 m) wide and as high as 9.85 ft (3 m) tall; combine additional groundsupport to achieve wider walls
- Use multiple kits to stack wider video walls
- Support for flat and concave video walls, including 5° and 10° curves
- Designed to work with the F2, F3, F4IP, F5IP, and Vivid 4 video panels
- Ships in road case for easy setup and pack after the gig
- DRB-F100CM, DRB-F50CM dual function rig bars required for operation (not included with GROUND SUPPORT)

Specifications

- IP Rating: IP20 (dry location)
- Weight: (total with case): 322 lb (146 kg)
(ground support without case): 165 lb (74 kg)
(empty case): 157 lb (71 kg)
- Dimensions: 10.24 x 3.28 x 3.28 ft (3.12 x 1 x 1 m)
- Housing Material: Aluminum extrusion and Steel
- Maximum vertical stack supported: 3 m tall
- Minimum width supported: 1.5 m wide
- Ballast needed per 1 M height stack: 100 lb (45 kg)
- Ballast needed per 2 M height stack: 175 lb (80 kg)

What's Included

- Warranty Card
- Quick Reference Guide
- 2PCS FLOOR BASE
- 2PCS ANGLING HORIZONTAL BAR
- 3PCS ANGLING 1M PIPE W/2PCS CLAMPS
- 6PCS 1M LADDER TRUSS W/SPIGOTS, PINS, AND SAFETY CLIPS
- 6PCS PANEL ATTACHMENT ARM
- 10PCS TR16 SCREW JACKS
- 12PCS M12 PANEL ATTACHMENT SCREWS