




## SlimPAR 56 IRC IP

SlimPAR 56 IRC IP is an LED PAR can-style wash light housed in a casing molded after the popular [SlimPAR 56](#). Powered by 108 red, green and blue LEDs, this IP65-rated fixture eliminates the worry of ruining your units if they get wet during an outdoor event or have a drink spilled on them. Customize light shows using 3- or 7-channels of DMX control. Or, for added convenience, optional wireless remote control is available from the [IRC-6](#) (Infrared Remote Control).

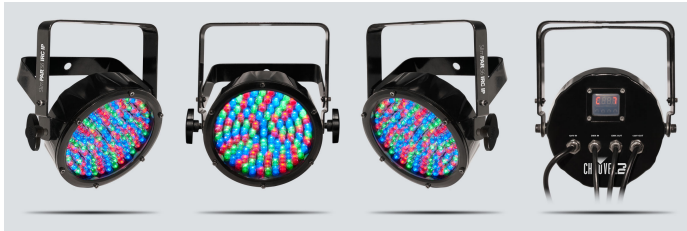

# Highlights

- Outdoor-rated, LED wash light designed for any temporary outdoor event
- Eliminate the worry of rain or spilled drinks with innovative, weather-proof housing
- Easy to store and transport due to its lightweight, slim design
- For wireless, non-DMX control, use the optional IRC-6 remote
- Reduce the need for extra extension cords with power and data linking outputs
- Easily transport up to 4 units in the optional CHS-SP4 VIP Gear Bag
- Create coordinated light shows by linking other fixtures in the SlimPAR™ series via Master/Slave mode
- Fits best in the CHS-SP4 VIP Gear Bag
- Compact design easily fits inside sticks of TRUSST®

## Specifications

- DMX Channels: 3 or 7
- DMX Connectors: 3-pin XLR
- Light Source: 108 LEDs (36 red, 36 green, 36 blue) 0.25 W (20 mA), 100,000 hours life expectancy
- PWM Frequency: 1,200 Hz
- Beam Angle: 14°
- Field Angle: 23°
- Illuminance: 876 lux @ 2 m
- IP Rating: IP65
- Power Linking: 49 units @ 120 V; 80 units @ 230 V
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Power and Current: 19 W, 0.2 A @ 120 V, 60 Hz 21 W, 0.1 A @ 230 V, 50 Hz
- Weight: 4.1 lb (1.9 kg)
- Size: 9.3 x 8 x 3.2 in (236 x 203 x 82 mm)
- Approvals: CE, MET
- Optional Controllers: IRC-6
- Startup Temperature: -4 °F to 113 °F (-20 to 45) °C
- Operating Temperature: -22 °F to 113 °F (-30 to 45) °C

## What's Included

- Power Cord
- DMX (in) adaptor
- DMX (out) adaptor
- Quick Reference Guide
- Warranty card