


Next Level event lighting

CHAUVET DJ tools for Big Occasion Power

See



Vivid 4 is a modular video panel that vividly displays content without the need of bulky media servers. Create dazzling video displays with these lightweight video panels that feature Black body LEDs that accurately reproduce high-contrast videos. Vivid 4 makes a perfect DJ façade and seamlessly integrates with Serato for displaying music videos to add gig excitement.

videopanels



Vivid 4

Light Source: 21,632 SMD 2,828 LEDs (tri-color RGB) 0.3 W, (60 mA), 50,000 hours life expectancy

Wavelength: 620 to 625 nm red, 516 to 530 nm green, 460 to 475 nm blue

Viewing Angle: 120°

Maximum Illuminance: 1,200 NITS

Calibrated Illuminance: 1,000 NITS

Contrast Ratio: 4,300:1

Refresh Rate: 1,920 Hz

Pixel Density: 43,264 m2 (104 x 208)

Pixel Pitch: 4.8 mm

Minimum Viewing Distance: 4 m

Control Protocol: Novastar

Power I/O Connectors: Seetronic® powerKON®

Signal I/O Connectors: Seetronic® etherKON®

Power Linking: 7 units @ 120 V; 13 units @ 230 V

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

Power and Current: 280 W, 2.3 A @ 120 V, 60 Hz

Power and Current: 280 W, 1.2 A @ 230 V, 50 Hz

Weight: 12.5 kg

Size: 500 x 65 x 1000 mm

Maximum Vertical Hang: 23 panels

Maximum Horizontal Hang: 17 panels

Required Controllers: Vivid Drive 23N

Optional Mounting Brackets: RB-F50CM, RB-F100CM

Approvals: CE, MET

Vivid Drive 23N

Control Protocol: Novastar

Control Input Connectors: RS-232, USB

Video Input Connectors: BNC, VGA, HDMI (w/ loop out)

Video Output Connector: HDMI, DVI, RJ45 (x2)

Max. Supported LEDs: 1,310,720

Max. Supported Panels (Vivid 4): 30 per RJ45

Included Rackmount: 1U

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

Power and Current: 40 W, 0.4 A @ 120 V, 60 Hz


Power and Current: 40 W, 0.2 A @ 230 V, 50 Hz

Weight: 1.4 kg

Size (w/o rackmount): 219 x 250 x 45 mm

Approvals: CE

move

A dynamic stage performance featuring a band and dancers. In the background, a band includes a guitarist in a patterned shirt and hat, a keyboardist, and a bassist. In the foreground, two dancers in black outfits with white geometric patterns on their chests are performing energetic moves, one holding a large white drum. The stage is lit with warm, yellow spotlights, creating a high-energy atmosphere.

The CHAUVET DJ line of Intimidator moving head fixtures is a powerful lighting addition to any large scale event production. Depending on which fixture is in your arsenal, a dynamic combination of bright LEDs, gobo and prism effects, zoom capability and more are at your service to bring your large scale events to life.

movingheads



Intimidator Spot 375Z

DMX Channels: 9 or 15
Light Source: 1 LED (white) 150 W, (12.3 A), 50,000 hours
Zoom Angle (motorized): 10° to 23°
Gobos: 7 + open (6 aluminum + 1 glass), rotating, interchangeable, indexing, slot-n-lock, continuous scroll at variable speeds
Gobo Size: 24 mm outside, 20 mm image, 1 mm max thickness
Colors: 7 + white, split colors, continuous scroll at variable speeds
Illuminance (10°): 38,000 lux @ 2 m
Illuminance (23°): 19,850 lux @ 2 m
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Weight: 12.4 kg
Size: 220 x 322 x 466 mm



Intimidator Trio

DMX Channels: 15 or 30
Light Source: 6 LEDs (quad-color RGBW) 21 W (6.3 A), 50,000 hours
Zoom Angle (motorized): 7° to 53°
Illuminance (7°): 16,000 lux @ 2 m
Illuminance (53°): 1,350 lux @ 2 m
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Weight: 9.2 kg
Size: 278 x 278 x 386 mm



Intimidator Spot 360

DMX Channels: 8 or 14
Light Source: 1 LED (white) 100 W, (3.2 A), 50,000 hours
Zoom Angle (manual): 12° to 17°
Gobos: 7 + open (6 metal + 1 glass), rotating, interchangeable, indexing, slot-n-lock, continuous scroll at variable speeds
Gobo Size: 24 mm outside, 20 mm image, 1.1 mm max thickness
Colors: 8 + white, split colors, continuous scroll at variable speeds
Illuminance (12°): 5,470 lux @ 5 m
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Weight: 11.4 kg
Size: 423 x 322 x 297 mm

move



movingheads



Intimidator Wash Zoom 450

DMX Channels: 14, or 29
Light Source: 12 LEDs (quad-color RGBW)
15 W (3.7 A), 50,000 hours
Illuminance: (14°): 25,610 lux @ 2 m
(58°): 1,960 lux @ 2 m
Illuminance: (50°): 998 lux @ 2 m
Input Voltage: 100 to 240 VAC, 50/60 Hz
(auto-ranging)
Weight: 7.2 kg
Size: 194 x 277 x 363 mm



Intimidator Beam 355 IRC

DMX Channels: 8 or 14
Light Source: 1 LED (white) 100 W, (27 A),
50,000 hours
Colors: 8 + white, split colors, continuous scroll at
variable speeds
Gobo wheel: 5 + open, animation effect,
continuous scroll at variable speeds
Illuminance 262,800 lux @ 2 m
Input Voltage: 100 to 240 VAC, 50/60 Hz
(auto-ranging)
Weight: 25.4 lb (11.6 kg)
Size: 322 x 220 x 480 mm



Intimidator Beam 140SR

DMX Channels: 8 or 14
Light Source (included): Osram Sirius HRI
140W discharge lamp, 6,000 hours
Beam Angle (beam): 3°
Beam Angle (frost): 21°
Gobos: 17 + open (all Aluminum), Fixed, contin-
uous scroll at variable speeds
Colors: 14 + white, split colors, continuous scroll
at variable speeds
Illuminance: 382,000 lux @ 5 m
Illuminance: 37,900 lux @ 15 m
Input Voltage: 100 to 240 VAC, 50/60 Hz
(auto-ranging)
Weight: 11.7 kg
Size: 322 x 220 x 420 mm



Intimidator Hybrid 140SR

DMX Channels: 13 or 19
Light Source (included): Osram Sirius HRI 140 W
discharge lamp, 6,000 hours
Zoom Angle Motorized (beam): 3° to 11° (spot):
7° to 21° (wash): 14° to 28°
Gobo wheel (1): 9 + open, rotating, interchangeable,
slot-n-lock, continuous scroll at variable speeds
Gobo wheel (2): 17 + open, metal, continuous
scroll at variable speeds
Colors: 12 + white, split colors, continuous scroll at
variable speeds
Illuminance (3° beam): 382,000 lux @ 5 m
Illuminance (7° spot): 104,700 lux @ 5 m
Illuminance (14° wash): 4,680 lux @ 5 m
Input Voltage: 100 to 240 VAC, 50/60 Hz (au-
to-ranging)
Weight: 15.2 kg
Size: 322 x 220 x 513 mm

Wash

CHAUVET DJ SlimPAR Pro and COLORband Pix M USB wash lights provide a bright, powerful punch for maximum event lighting impact and can wash any stage or event space with warm, rich and vibrant colors. With the addition of D-Fi USB compatibility, these fixtures are equipped with wireless DMX capability taking creative lighting flexibility to new heights.

washlights



245° Rotating LED Strip Light

COLORband PiX-M USB

DMX Channels: 5, 6, 8, 10, 17, 32 or 36
Tilt: 245°
Light Source: 10 LEDs (tri-color RGB) 9 W, (2A), 50,000 hours
Beam Angle: 20°
Illuminance: 6,120 lux @ 2 m
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Weight: 4.4 kg
Size: 785 x 67 x 123 mm



SlimPAR Pro QZ12 USB

DMX Channels: 5, 6 or 11
Light Source: 12 LEDs (quad-color RGBA) 10 W (2.7 A), 50,000 hours
Zoom Angle (beam to field): 10° to 50°
Illuminance (10°): 16,070 lux @ 2 m
Illuminance (50°): 1,216 lux @ 2 m
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Weight: 4.6 kg
Size: 234 x 269 x 318 mm



SlimPAR Pro H USB

DMX Channels: 6, 7 or 12
Light Source: 12 LEDs (hex-color RGBAW+UV) 10 W (2.4 A), 50,000 hours
Beam Angle: 24°
Illuminance: 3,218 lux @ 2 m
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Weight: 3.3 kg
Size: 253 x 98 x 290 mm

SlimPAR Pro Q USB

DMX Channels: 4, 5 or 10
Light Source: 12 LEDs (quad-color RGBA) 6 W (2 A), 50,000 hours
Beam Angle: 16°
Illuminance: 5,690 lux @ 2 m
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Weight: 3.3 kg
Size: 253 x 98 x 290 mm

SlimPAR Pro W USB

DMX Channels: 3, 4 or 9
Light Source: 12 LEDs (tri-color CW, WW, A) 6 W (1.4 A), 50,000 hours
Color Temperature Range: 1700 to 6300 K
Beam Angle: 17°
Illuminance: 3,097 lux @ 2 m
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Weight: 3.2 kg
Size: 253 x 98 x 290 mm

spot



CHAUVET DJ spotlight fixtures are versatile and powerful featuring hard focus, soft washes and crisp, bright beams to project from distances near or far.

spotlights



LED Followspot 120ST

DMX Channels: 3
Light Source: 1 LED (cool white) 120 W (30.6A), 50,000 hours
Zoom Angle: (manual): 14° to 20°
Illuminance: (14°): 16,060 lux @ 2 m
Illuminance: (20°): 7,900 lux @ 2 m
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Weight: 16.6 lb (7.5 kg)
Size: 582 x 279 x 341 mm



Uses glass gobos to create incredible gobo or pattern details.



EVE E-100Z

DMX Channels: 1 or 3
Light Source: 1 LED (warm white) 100 W (2.3 A), 50,000 hours
Color Temperature: 3500 K
Gobo Size: M 66 mm outside, 48 mm image, 2 mm max thickness
Zoom Angle (manual): 14° to 30°
Illuminance (14°): 15,100 lux @ 2 m
Illuminance (30°): 3,800 lux @ 2 m
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Weight: 5.7 kg
Size: 611 x 183 x 430 mm

maze



CHAUVET DJ has a variety of haze machines, fog machines and atmospheric effects with a full array of powerful production features to meet any event effect needs.



haze & fogmachines

Atmospheric Fluids



GJ5
Quick Dissipating Fluid



HJ5
High Performance Haze Fluid



FJ5
High Density Fog Fluid



Hurricane Haze 4D

DMX Channels: 2
Tank Capacity: 0.9 gal (3.75 l)
Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
Output: 4,300 cfm
Weight: 6 kg
Size: 277 x 396 x 245 mm



Hurricane 1600

DMX Channels: 1
Tank Capacity: 0.63 gal (2.4 l)
Input Voltage: 120 VAC, 60 Hz or 230 V, 50 Hz
Output: 25,000 cfm
Weight: 6 kg
Size: 348 x 312 x 253 mm

fog



Create a white fog that hugs the floor and dissipates without rising or blast a dynamic and safe pyrotechnic-like effect without the use of any toxic chemicals.

haze & fog machines



Cumulus

Tank Capacity: .9 gal (3.25 l)
Water Tank Capacity: 2 gal (7.6 l)
Heat-up time: 3 min
Output: 10,000 cfm
Fog Fluid Consumption: 80 ml/min
Water Consumption: 930 ml/min
Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
Weight: 26.7 kg
Size: 625 x 409 x 453 mm



Nimbus

Tank Capacity: 4.5 gal (17 l)
Heat-up time: (single element): 50 min
Heat-up time: (dual element): 30 min
Reheat time: (single element): 30 min
Reheat time: (dual element): 15 min
Average runtime: 6 min
Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
Dry ice capacity: 10 lb (4.5 kg)
Weight (full): 34 kg
Size: 513 x 465 x 470 mm



Wireless Remote Included

Geyser P7

DMX Channels: 15
Output: 17,000 cfm
Light Source: 7 LEDs (penta-color RGBA+UV) 9W (3 A), 50,000 hours
Tank Capacity: 0.7 gal (2.5 L)
Input Voltage: 120 VAC, 60 Hz or 230 VAC, 50 Hz
Weight: 8.5 kg
Size: 400 x 362 x 210 mm

freedom



CHAUVET DJ's battery powered Freedom series fixtures are 100% wireless and can operate with its built in D-Fi transceiver technology. Bright, dynamic light with a variety of LED color combinations for unlimited color mixing anywhere you need it.

batterypowered



Freedom Flex H4 IP

DMX Channels: 6, 8 or 12
Light Source: 4 LEDs (hex-color RGBAW + UV) 10 W, (2 A), 50,000 hours
Beam Angle: 23°
Maximum Run Time (all on): up to 8 hours
Illuminance: 2,163 lux @ 2 m
Weight: 4 kg
Size: 145 x 138 x 204 mm



Freedom Par Quad-4 IP

DMX Channels: 4, 6 or 10
Light Source: 4 LEDs (quad-color RGBA) 5 W (2 A), 50,000 hours
Beam Angle: 15°
Maximum Run Time: (all on): up to 8 hours
Illuminance: 2,464 lux @ 2 m
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Weight: 3.6 kg
Size: 145 x 138 x 191 mm




Freedom Par Hex-4

DMX Channels: 6, 8, or 12
Light Source: 4 LEDs (hex-color RGBAW+UV) 10 W (2 A), 50,000 hours
Beam Angle: 23°
Maximum Run Time (all on): up to 8 hours
Illuminance: 1,372 lux @ 2 m
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Weight: 2.9 kg
Size: 138 x 145 x 184 mm



Freedom Par H1

DMX Channels: 6, 8 or 12
Light Source: 1 LED (hex-color RGBAW+UV) 10 W, (3 A), 50,000 hours
Color Temperature Range: 1,700 to 6,300 K
Beam Angle: 21°
Illuminance (w/o filter): 314 lux @ 2 m
Input Voltage: 8.4 VDC, 1.35 A (external power supply: 100-240 VAC, 50/60 Hz)
Weight: 0.7 kg
Size: 97 x 75 x 139 mm

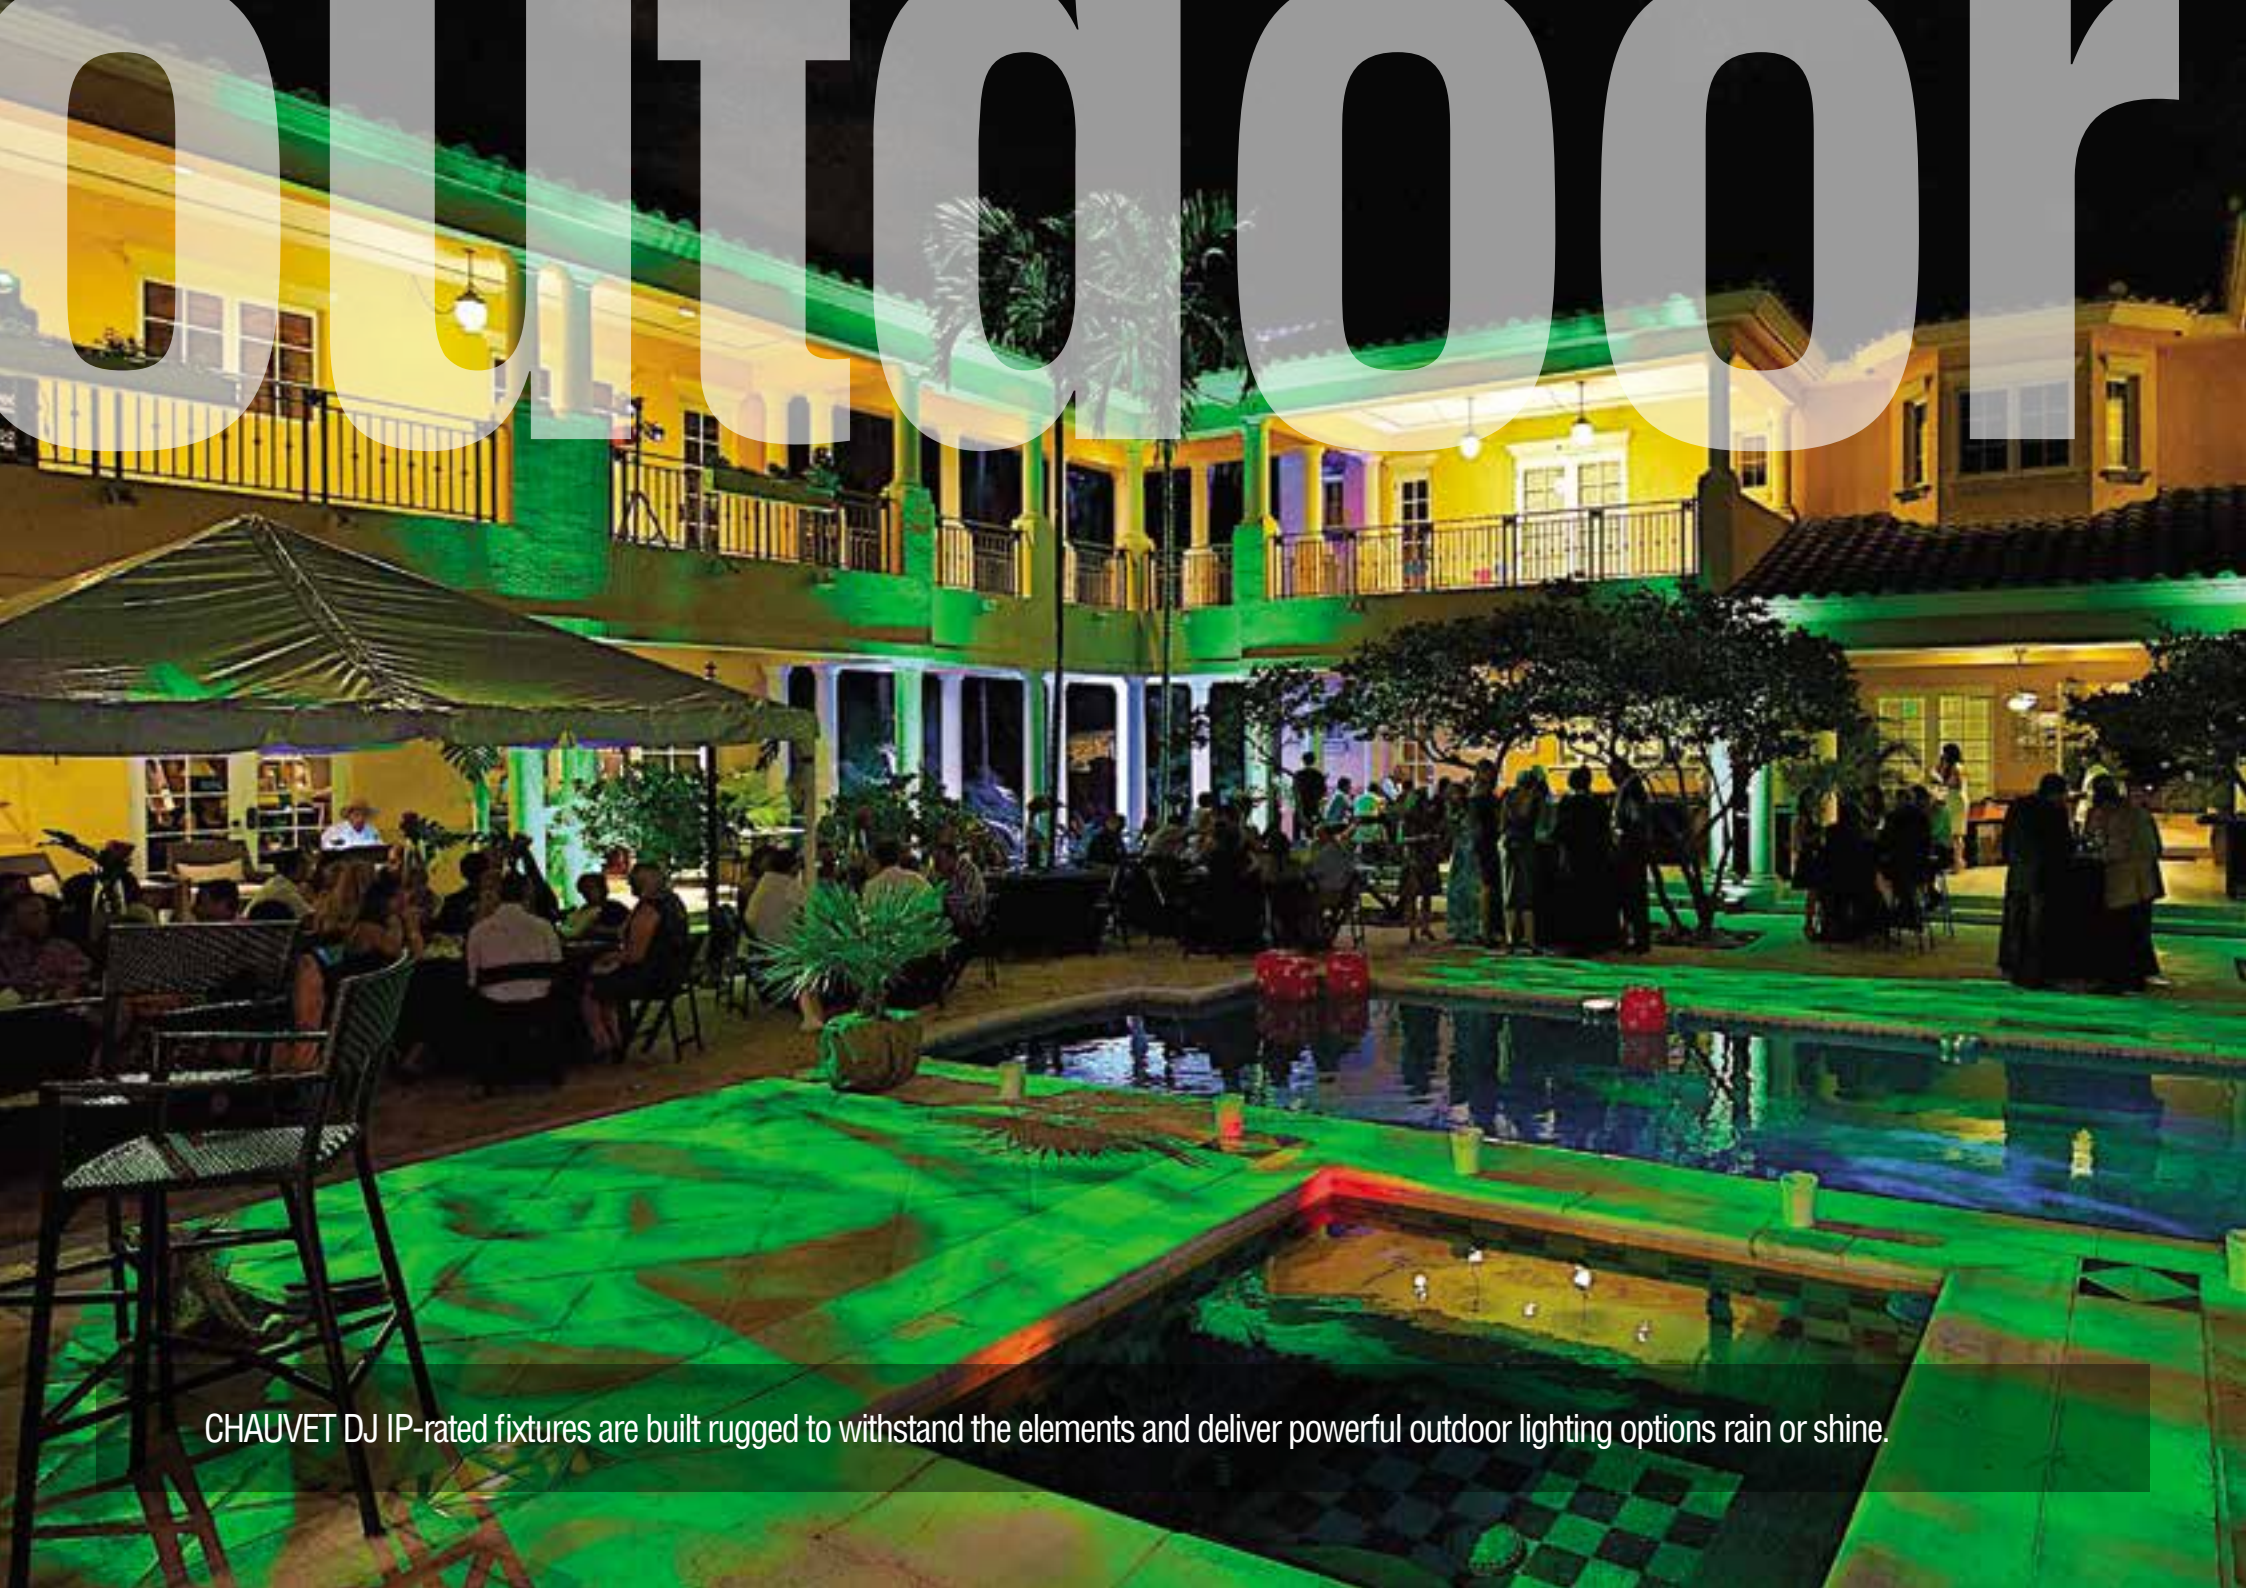

Outdoor

CHAUVET DJ IP-rated fixtures are built rugged to withstand the elements and deliver powerful outdoor lighting options rain or shine.



outdoor**fixtures**



Festoon

DMX Channels: 3, 8, 9, 60, 120 or 180

Light Source: 6 SMD LED's (tri-color RGB) (50 mA) per bulb, 50,000 hours

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

IP Rating: IP43

Weight: (Controller): 4.8 kg

Size: (String): 15000 x 60 x 133 mm (Controller): 190 x 213 x 48.7 mm



Freedom Par Quad-4 IP

DMX Channels: 4, 6 or 10

Light Source: 4 LEDs (quad-color RGBA) 5 W, (2 A), 50,000 hours

Beam Angle: 15°

Illuminance: 2,464 lux @ 2 m

IP Rating: IP54

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

Weight: 3.6 kg

Size: 145 x 138 x 191 mm



COLORband PiX IP

DMX Channels: 3, 4, 6, 7, 9, 12, 18 or 36

Light Source: 12 LEDs (tri-color RGB) 3 W (1,050 mA), 50,000 hours

Beam Angle: 20°

Illuminance: 2,325 lux @ 2 m

P Rating: IP65

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

Weight: 6.1 kg

Size: 993 x 100 x 173 mm



EV

SIOUXLAND
oral & maxillofacial
surgery



A new day of production lighting power. Stage-ready fixtures produce powerful warm spots and washes to highlight the action.

EVEseries



EVE F-50Z

DMX Channels: 1 or 3
Light Source: 1 LED (warm white)
50 W, (1.3 A), 50,000 hours
Color Temperature: 3500 K
Zoom Angle: (manual): 17° to 50°
Illuminance: (17°): 4,780 lux @ 2 m
Illuminance: (50°): 998 lux @ 2 m
Input Voltage: 100 to 240 VAC, 50/60 Hz
(auto-ranging)
Weight: 3.9 kg
Size: 281 x 212 x 328 mm



EVE TF-20

Light Source: 1 LED (warm white COB)
20 W, (0.5 A), 50,000 hours
Color Temperature: 2700 K
Beam Angle: 24°
Illuminance: 1,506 lux @ 2 m
Input Voltage: 85 to 120 VAC, 50/60 Hz
(auto-ranging)
Weight: 1.2 kg
Size: 153.5 x 140 x 184 mm



EVE E-100Z

DMX Channels: 1 or 3
Light Source: 1 LED (warm white)
100 W (2.3 A), 50,000 hours
Color Temperature: 3500 K
Gobo Size: M (66 mm outside, 48 mm image,
2 mm max thickness)
Zoom Angle: (manual): 14° to 30°
Illuminance: (14°): 15,100 lux @ 2 m
Illuminance: (30°): 3,800 lux @ 2 m
Input Voltage: 100 to 240 VAC, 50/60 Hz
(auto-ranging)
Weight: 5.7 kg
Size: 611 x 183 x 430 mm



EVE E-50Z

DMX Channels: 1 or 3
Light Source: 1 LED (warm white)
Color Temperature: 3500 K
50 W, (1.3 A), 50,000 hours
Gobo Size: D (53.3 mm outside, 43 mm
image, 2 mm max thickness)
Zoom Angle: (manual): 20° to 39°
Illuminance: (20°): 7,910 lux narrow @ 2 m
Illuminance: (39°): 2,710 lux wide @ 2 m
Input Voltage: 100 to 240 VAC, 50/60 Hz
(auto-ranging)
Weight: 9.2 lb (4.2 kg)
Size: 18.9 x 6.2 x 15 in (480 x 157 x 381 mm)
CRI: 81



EVEseries



EVE P-100 WW

DMX Channels: 1, 2 or 4
Light Source: 1 COB (warm white) 100 W, (2.7 A), 50,000 hours
Color Temperature: 3500 K
Illuminance (25°): 7,920 lux @ 2 m
Illuminance (35°): 4,340 lux @ 2 m
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Weight: 3.5 kg
Size: 220 x 245 x 305 mm



EVE P-130 RGB

DMX Channels: 3 or 9
Light Source: 40 LEDs (13 red, 13 green, 14 blue) 130 W total, (2.5 A), 50,000 hours
Illuminance (25°): 2,190 lux @ 2 m
Illuminance (35°): 1,100 lux @ 2 m
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Weight: 3.5 kg
Size: 220 x 245 x 305 mm



EVE P-140 VW

DMX Channels: 3 or 9
Light Source: 40 LEDs (13 cool white, 13 warm white, 14 amber) 140 W total, (2.4 A), 50,000 hours
Illuminance (25°): 2,490 lux @ 2 m
Illuminance (35°): 1,245 lux @ 2 m
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Weight: 3.5 kg
Size: 220 x 245 x 305 mm



EVE P-150 UV

DMX Channels: 1 or 5
Light Source: 40 LEDs (UV) 150 W total, (2 A), 50,000 hours
Coverage Angle (narrow lens): 25°
Coverage Angle (no lens): 35°
Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
Weight: 3.5 kg
Size: 220 x 245 x 305 mm



WARRIOR

CONFERENCE



CHAUVET DJ Academy

A NEW CLASS OF EDUCATION

CHAUVET DJ Academy is an interactive and informative online video program covering a wide range of topics such as lighting, sales, marketing, business tips and more.

There are four levels: Beginner, Intermediate, Advanced and Expert. Each level contains five videos that cover a number of different topics related to lighting and the mobile entertainment business. At the end of each video, you will need to complete and pass a five-question quiz in order to continue on to the next video. Once you complete and pass all five quizzes for each of the levels you will earn a certificate and CHAUVET DJ VIP Reward points*.

Classes are in session!

* Not all participants may be eligible for rewards and certain rewards may be available only to certain geographic locations.
No substitution or compensation will be made in cases to participants living outside of a geographic location required for a particular reward.

REGISTER NOW FOR FREE

chauvetacademy.com/register



Global Headquarters

5200 N.W. 108th Avenue
Sunrise, FL 33351
USA

Phone: +1 800.762.1084

California Branch

7555 N San Fernando Road
Burbank, CA 91505
USA

Phone: +1 800.762.1084

UK Branch

Unit 1C Brookhill Road
Industrial Estate Pixton,
Nottingham NG16 6NT
United Kingdom

Phone: +44 1773 511115

Belgium Branch

Stokstraat 18
9770 Kruishoutem
Belgium

Phone: +32 9 388 93 97

Mexico Branch

Av. de las Partidas 34, 3-B
(entrada por Calle 2) Zona
Industrial Lerma Lerma,
México, C.P. 52000

Phone: +52 728 690 2010

National Authorised Distributor

Audio Visual Engineering
318-320 Hammond Rd
Dandenong
VIC , 3175, Australia

Email: sales@avecorp.com.au
avecorp.com.au

