


Impulse 648

HIGHLIGHTS

- Professional and rugged LED strobe light designed for the mobile entertainer, lighting professional or permanent installation
- Achieve a great blend of intensity and toughness with road-ready SMD LEDs
- Increase flexibility with built-in, 3- and 5-pin XLR DMX connectors
- Radiant cooling design allows for use in the most sound-sensitive environments
- Ensure a secure power cord using the locking IEC power input (US/UK version only)
- Eliminate the need for an external controller with adjustable intensity and strobe rates in stand-alone mode

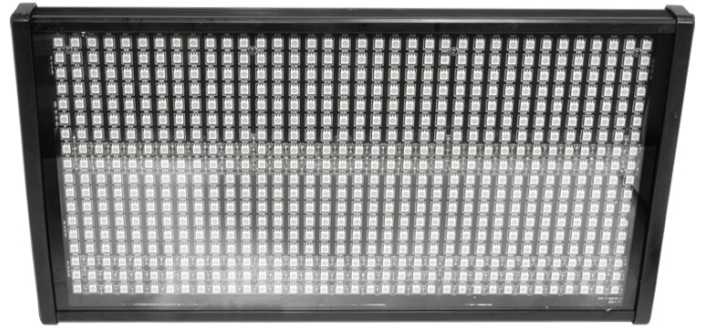

SPECIFICATIONS

- DMX Channels : 2
- DMX Connectors : 3- and 5-pin XLR
- Light Source : 648 LEDs (white) SMD (60 mA), 50,000 hours life expectancy
- Strobe Rate : 0 to 30 Hz
- Beam Angle : 66°
- Field Angle : 105°
- Illuminance : 909 lux @ 2 m
- Power Linking : 5 units @ 120 V; 10 units @ 230 V
- Input Voltage : 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Power and Current : 237 W, 1.9 A @ 120 V, 60Hz
235 W, 1.0 A @ 230 V, 50Hz
- Weight : 10.6 lb (4.8 kg)
- Size : 16.7 x 8.8 x 6.5 in (424 x 224 x 164 mm)
- Approvals : CE
- Viewing Angle : 120°
- Color Temperature Range : 6,500 to 7,000 K