


LED Shadow 2 ILS

HIGHLIGHTS

- Versatile black light with brilliant eye candy effects
- ILS compatibility for use in the ILS ecosystem
- D-Fi USB compatibility for wireless Master/Slave, or DMX control
- Generate complex looks easily with built-in, eye-catching auto programs with sectional control
- Access built-in automated programs via IRC6 remote, Master/Slave, or DMX
- Achieve smooth LED fading with built-in dimming curves
- Ideal for sound-sensitive environments due to the radiant cooling design
- Save time running extension cords by power linking multiple units

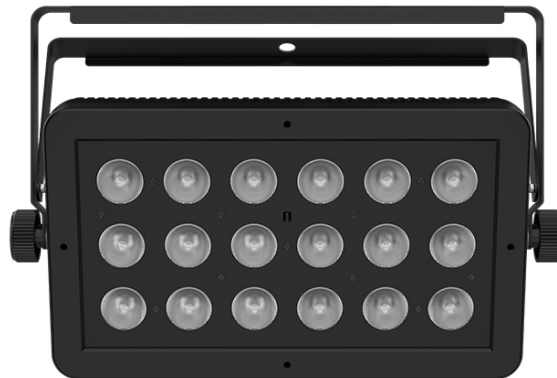

SPECIFICATIONS

- DMX Channels : 4 or 8
- DMX Connectors : 3-pin XLR
- Light Source : 18 LEDs (UV) 3 W, (0.6 A), 50,000 hours life expectancy
- Strobe Rate : 0 to 20 Hz
- Coverage Angle : 32°
- Power Linking : 11 units @ 120 V; 20 units @ 230 V
- Input Voltage : 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Power and Current :
49 W, 0.7 A @ 120 V, 60 Hz
49 W, 0.4 A @ 230 V, 50 Hz
- Weight : 6 lb (2.8 kg)
- Size : 8.2 x 14 x 2.2 in (208 x 355 x 55 mm)
- Approvals : CE, RoHS, UKCA
- Optional Controllers : IRC-6
- Wavelength : 405 nm

WHAT'S INCLUDED

- Power cord
- Hanging Bracket with Mounting Hardware
- Warranty Card