


Shocker Panel 480

HIGHLIGHTS

- Punchy, single-zone blinder with cool white SMD LEDs
- Rugged housing makes it ideal for mobile applications
- Trigger eye-catching strobe effects via the built-in display, DMX, or with the optional IRC6 remote
- powerCON®-compatible power input/output connections for power linking
- Save time running cables and extension cords by power linking multiple units
- Easily transports in the optional CHS-25 VIP gear bag

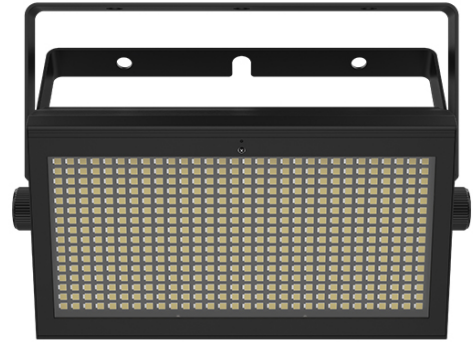

SPECIFICATIONS

- DMX Channels : 4
- DMX Connectors : 3-pin XLR
- Light Source : 480 SMD LEDs (cool white) 0.7 W (236 mA), 50,000 hours life expectancy
- Strobe Rate : 0 to 28 Hz
- Beam Angle : 111°
- Field Angle : 155°
- Illuminance : 1,348 lux @ 2 m
- Lumens : 14,974
- Power Linking : 5 units @ 120 V; 9 units @ 230 V
- Input Voltage : 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Weight : 9.4 lb (4.3 kg)
- Size : 13.1 x 4.5 x 6.7 in (332 x 115 x 170 mm)
- Power and Current : 208 W, 2.7 A @ 120 V, 60 Hz
- Power and Current : 200 W, 1.5 A @ 230 V, 50 Hz
- Bracket Mounting Hole : 13 mm
- Optional Controllers : IRC6
- Approvals : CE, UKCA

WHAT'S INCLUDED

- Shocker Panel 480
- Power cord
- Quick Reference Guide