




MotionSet LED

MotionSet LED combines the popular 6.6 x 9.8ft (2 X 3m) [MotionDrape LED](#) and 4 x 6.6ft (1.22 x 2m) [MotionFaçade LED](#) into one sizzling package for the mobile entertainer. Now with only one controller, you can easily control and synchronize the two products and create one amazing presentation.

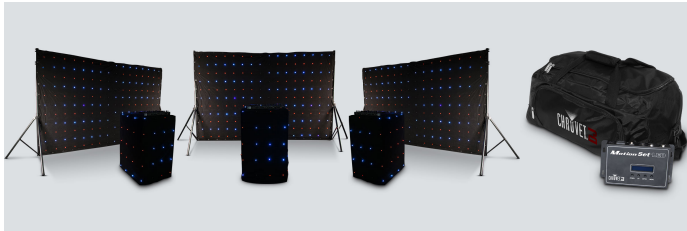

Highlights

- Create a professional setup at any mobile event with this set that combines the 6.6 x 9.8 ft (2 x 3 m) LED Drape and the 4 x 6.6 ft (1.22 x 2 m) LED Façade
- Simplify setup, operation and synchronization using a single controller for both products
- Wow your audience with 30 built-in patterns including a multicolor rain effect and simulated equalizer pattern
- Trigger effects using built-in, sound-activation mode
- Easily select and activate your favorite programs with or without DMX 512 console
- Match the color scheme at any event with full RGB color-mixing capability
- Achieve full control over output with master dimmer capability
- Create customized looks using high-output, tri-color SMD LEDs and 8 channels of DMX control
- Mounts to truss and various stand applications using built-in grommets
- Manufactured from certified fire-retardant material (NFPA)
- Convenient storage and transport using the included carry bag
- Replace conventional front boards with the LED Façade by attaching it directly to your coffin case or rack with sewn-in Velcro™ fasteners

Specifications

- DMX Channels: 8
- DMX Connectors: 3-pin XLR
- Light Source: (LED Drape): 176 LEDs (tri-color RGB) SMD, 50,000 hours life expectancy (LED Façade): 66 LEDs (tri-color RGB) SMD (20 mA), 50,000 hours life expectancy
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Power and Current: 49 W, 0.4 A @ 120 V, 60 Hz 57 W, 0.2 A @ 230 V, 50 Hz
- Weight: (Controller): 2.2 lb (1.1 kg) (Drapes): 13.7 lb (6.1 kg)
- Dimensions: (Controller): 5.3 x 9.6 x 2 in (135 x 243 x 50 mm) (LED Drape): 6.6 x 9.8 ft (2 x 3 m) (LED Façade): 4 x 6.6 ft (1.2 x 2 m)
- Approvals: CE, NFPA

What's Included

- Controller and Power cord
- Carry bag
- Signal cable
- Replacement LEDs
- Quick Reference Guide / Warranty card