




Shocker Panel 180 USB

Shocker Panel 180 USB is a high-impact LED strobe light featuring four zones of control. Eye-popping built-in effects and chases pre-programs can be triggered via master/slave, DMX mode or the optional IRC-6 remote (sold separately). The fixture also offers D-Fi USB compatibility for wireless master/slave or DMX connectivity. Special effects macros and zone control add to the visual impact of this impressive strobe, which can be power linked in multiples to save time running cables and extension cords. The [CHS-25](#) VIP Gear Bag is recommended for transport.

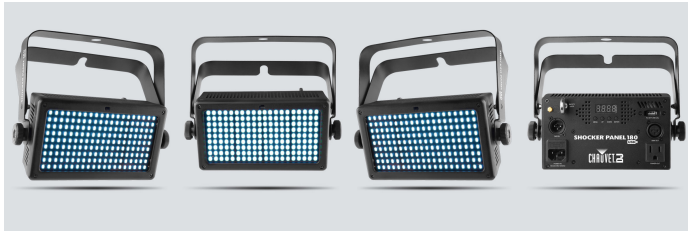

Highlights

- High-power, LED strobe light creates attractive effects using 4 zones of control
- Rugged die-cast housing makes it ideal for mobile applications
- D-Fi USB compatibility for wireless Master/Slave or DMX control
- Trigger eye-catching effects with built-in automated programs via Master/Slave, DMX mode or optional IRC-6 remote
- Multiple programs create pulsing effects and chases
- Combine zone control and special effect macros for stunning visual impact
- Save time running cables and extension cords by power linking multiple units
- Easily transports in the optional CHS-25 VIP Gear Bag

Specifications

- DMX Channels: 2, 5 or 8
- DMX Connectors: 3-pin XLR
- Light Source: 180 SMD LEDs (cool white) 0.5 W (644 mA), 50,000 hours life expectancy
- Strobe Rate: 0 to 29 Hz
- Beam Angle: 65°
- Illuminance: 257 lux @ 2 m
- Power Linking: 13 units @ 120 V; 24 units @ 230 V
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Power and Current: 41 W, 0.6 A @ 120 V, 60 Hz
40 W, 0.3 A @ 230 V, 50 Hz
- Weight: 3.4 lb (1.6 kg)
- Size: 8.8 x 2.25 x 7.8 in (223 x 57 x 198 mm)
- Approvals: CE
- Optional Controllers: IRC-6, D-Fi USB

What's Included

- Power cord
- Warranty card